


IBM CORPORATION  
PC NETWORK ADAPTER (BASEBAND)

NIC Type	Baseband
Transfer Rate	Unspecified
Data Bus	8-bit ISA
Topology	Linear Bus
Wiring Type	Twisted pair (8-wire)
Boot ROM	Not Available

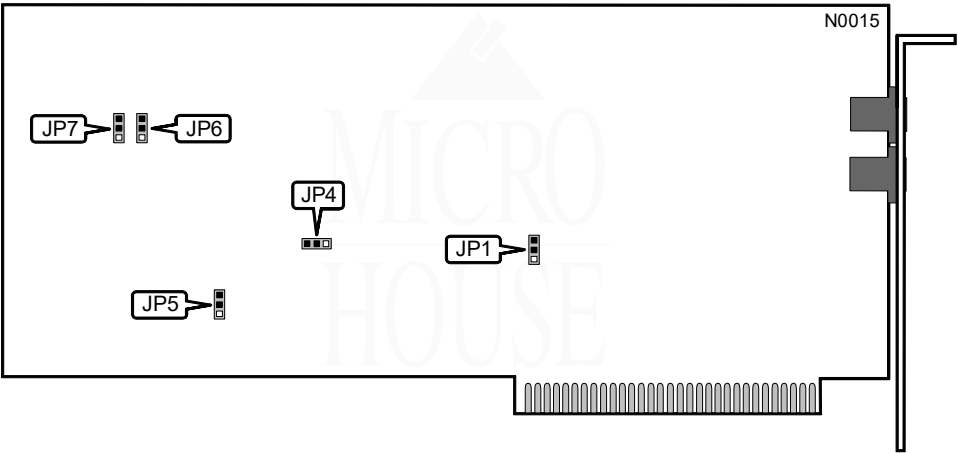

INTERRUPT REQUEST	
IRQ	JP1
i2	Pins 1 & 2 closed
3	Pins 2 & 3 closed

I/O ADDRESS	
Address	JP4
i620h	Pins 1 & 2 closed
628h	Pins 2 & 3 closed

BASE MEMORY ADDRESS	
Address	JP5
iCC00h	Pins 1 & 2 closed
DC00h	Pins 2 & 3 closed

ROM BIOS	
Setting	JP7
iEnabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

Continued on next page . . .

**IBM CORPORATION  
PC NETWORK ADAPTER (BASEBAND)***... continued from previous page*

BOOT ROM	
Setting	JP6
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

MISCELLANEOUS TECHNICAL NOTES
The DMA channel is permanently fixed at 3. If two adapters will be installed into one station then disable the ROM BIOS on the second adapter.