


IBM CORPORATION
TOKEN-RING 16/4 ADAPTER

NIC Type	Token-Ring
Transfer Rate	4/16Mbps
Data Bus	8-bit ISA
Topology	Ring
Wiring Type	IBM Type-6
Boot ROM	Available

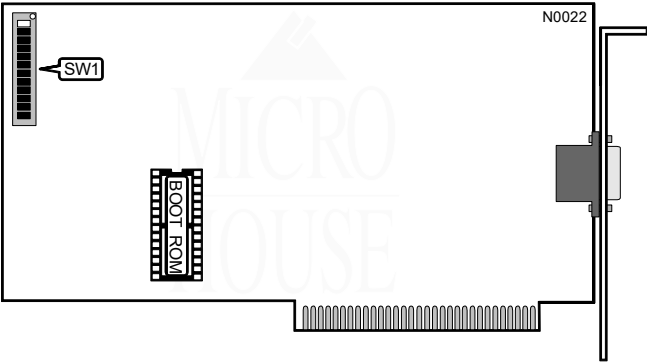

BOOT ROM ADDRESS SELECTION						
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
A000h	On	Off	On	On	On	On
A400h	On	Off	On	On	Off	On
A800h	On	Off	On	Off	On	On
AC00h	On	Off	On	Off	Off	On
B000h	On	Off	Off	On	On	On
B400h	On	Off	Off	On	Off	On
B800h	On	Off	Off	Off	On	On
BC00h	On	Off	Off	Off	Off	On
C000h	Off	On	On	On	On	On
C400h	Off	On	On	On	Off	On
C800h	Off	On	On	Off	On	On
CC00h	Off	On	On	Off	Off	On
CE00h	Off	On	On	Off	Off	Off
D000h	Off	On	Off	On	On	On
D200h	Off	On	Off	On	On	Off
D400h	Off	On	Off	On	Off	On
D800h	Off	On	Off	Off	On	On
DC00h	Off	On	Off	Off	Off	On
E000h	Off	Off	On	On	On	On
E400h	Off	Off	On	On	Off	On
E800h	Off	Off	On	Off	On	On
EC00h	Off	Off	On	Off	Off	On
F000h	Off	Off	Off	On	On	On

Continued on next page

IBM CORPORATION TOKEN-RING 16/4 ADAPTER

... continued from previous page

INTERRUPT REQUEST SELECTION		
IRQ	SW1/7	SW1/8
2	On	On
3	On	Off
7	Off	Off

I/O BASE ADDRESS SELECTION	
Address	SW1/9
iA20h	Off
A24H	On

SHARED RAM SIZE SELECTION		
Shared RAM size	SW1/10	SW1/11
8KB	On	On
i16KB	Off	On
32KB	On	Off
64KB	Off	Off

NETWORK SPEED SELECTION	
Speed	SW1/12
4Mbps	On
16Mbps	Off