



STANDARD MICROSYSTEMS CORPORATION

ETHERNET SMC3016/MC

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit MCA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

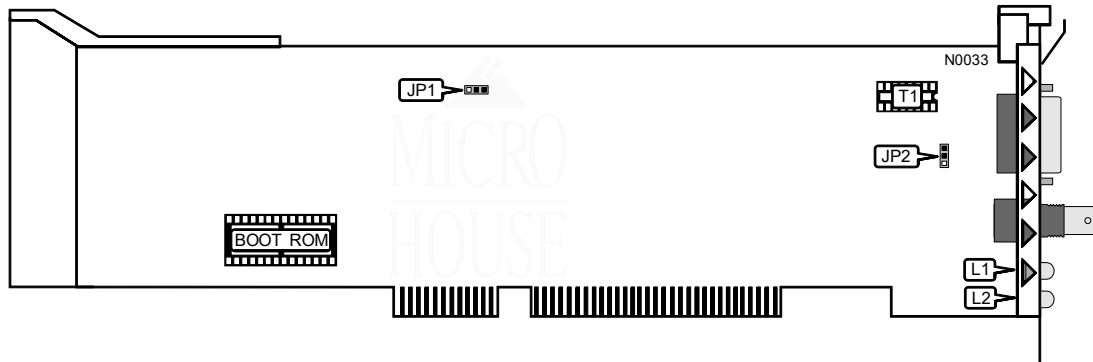

CABLE TYPE			
Type	JP1	JP2	Pulse Transformer T1
RG-58A/U 50ohm coaxial	Open	Open	installed
AUI transceiver via DB-15 port	Closed	Open	not installed



DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Data is being transmitted
LED1	Off	Data is not being transmitted
LED2	On	Data is being received
LED2	Off	Data is not being received