


# CNET TECHNOLOGY, INC.

## C N 6 5 0 E

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	16-bit ISA
<b>Topology</b>	Star
	Linear Bus
<b>Wiring Type</b>	Unshielded twisted pair
	RG-58/U 93ohm coaxial
	AUI transceiver via DB-15 port
<b>Boot ROM</b>	Available

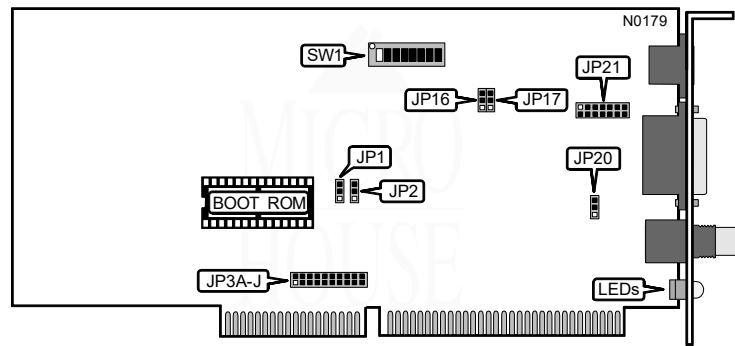

BOOT ROM	
Setting	JP1
iDisabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

WAIT STATE	
Setting	JP2
i0 wait states	pins 1 & 2 closed
1 wait state	pins 2 & 3 closed

INTERRUPT REQUEST										
IRQ	JP3A	JP3B	JP3C	JP3D	JP3E	JP3F	JP3G	JP3H	JP3I	JP3J
2/9	Closed	Open	Open	Open	Open	Open	Open	Open	Open	Open
i3	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open
11	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open
12	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open
14	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed

Continued on next page . . .

# CNET TECHNOLOGY, INC.

## C N 6 5 0 E

... continued from previous page

CABLE TYPE		
Type	JP16	JP21A - JP21G
iRG-58A/U 50ohm coaxial	pins 1 & 2 closed	pins 1 & 2 closed
Unshielded twisted pair	pins 2 & 3 closed	pins 2 & 3 closed
AUI transceiver via DB-15 port	pins 1 & 2 closed	pins 2 & 3 closed

LINK INTEGRITY TEST	
Setting	JP31
Enabled	Pins 1 & 2 Closed
Disabled	Pins 2 & 3 Closed
Note: Link Integrity is only used with 10Base-T wiring. When using other than 10BaseT, the test should be disabled.	

ONBOARD TERMINATOR	
Setting	JP20
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed
Note: If the card is on either end of a linear bus network segment, the onboard terminator may be used instead of using an external terminator.	

BOOT ROM ADDRESS				
Address	SW1/1	SW1/2	SW1/3	SW1/4
C0000h	On	On	On	On
C4000h	On	On	On	Off
iC8000h	On	On	Off	On
CC000h	On	On	Off	Off
D0000h	On	Off	On	On
D4000h	On	Off	On	Off
D8000h	On	Off	Off	On
DC000h	On	Off	Off	Off

Continued on next page ...

**CNET TECHNOLOGY, INC.**  
**C N 6 5 0 E**

... continued from previous page

I/O BASE ADDRESS				
Address	SW1/5	SW1/6	SW1/7	SW1/8
200-21Fh	On	On	On	On
220-23Fh	On	On	On	Off
240-25Fh	On	On	Off	On
280-29Fh	On	Off	On	On
2A0-2BFh	On	Off	On	Off
2C0-2DFh	On	Off	Off	On
300-31Fh	Off	On	On	On
320-33Fh	Off	On	On	Off
340-35Fh	Off	On	Off	On
360-37Fh	Off	On	Off	Off



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
1	Green	On	Twisted pair network connection is good
1	Green	Off	Twisted pair network connection is broken
2	Red	Blinking	Data is being received
2	Red	Off	Data is not being received