


CNET TECHNOLOGY, INC. CN600E/680E

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Available

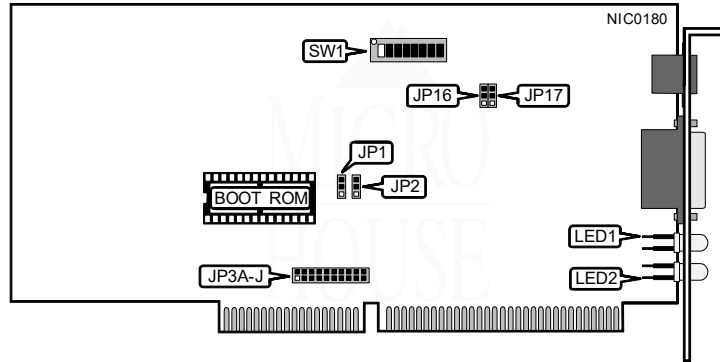

BOOT ROM	
Setting	JP1
iDisabled	Pins 1 & 2 Closed
Enabled	Pins 2 & 3 Closed

WAIT STATE	
Setting	JP2
i0 wait states	pins 1 & 2 closed
1 wait state	pins 2 & 3 closed

INTERRUPT REQUEST										
IRQ	JP3A	JP3B	JP3C	JP3D	JP3E	JP3F	JP3G	JP3H	JP3I	JP3J
2/9	Closed	Open	Open	Open	Open	Open	Open	Open	Open	Open
i3	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open
11	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open
12	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open
14	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed

Continued on next page . . .

CABLE TYPE	
Type	JP16
iUnshielded twisted pair	Pins 2 & 3 Closed
AUI transceiver via DB-15	Pins 1 & 2 Closed

LINK INTEGRITY TEST	
Setting	JP31
iEnabled	Pins 1 & 2 Closed
Disabled	Pins 2 & 3 Closed
Note: Link Integrity is only used with 10Base-T wiring. When using an AUI transceiver, the test should be disabled.	

BOOT ROM ADDRESS				
Address	SW1/1	SW1/2	SW1/3	SW1/4
C0000h	On	On	On	On
C4000h	On	On	On	Off
iC8000h	On	On	Off	On
CC000h	On	On	Off	Off
D0000h	On	Off	On	On
D4000h	On	Off	On	Off
D8000h	On	Off	Off	On
DC000h	On	Off	Off	Off

I/O BASE ADDRESS				
Address	SW1/5	SW1/6	SW1/7	SW1/8
200-21Fh	On	On	On	On
220-23Fh	On	On	On	Off
240-25Fh	On	On	Off	On
280-29Fh	On	Off	On	On
2A0-2BFh	On	Off	On	Off
2C0-2DFh	On	Off	Off	On
i300-31Fh	Off	On	On	On
320-33Fh	Off	On	On	Off
340-35Fh	Off	On	Off	On
360-37Fh	Off	On	Off	Off

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	Blinking	Data is being received
LED1	Red	Off	Data is not being received
LED2	Green	On	Data is being transmitted
LED2	Green	Off	Data is not being transmitted