


ASUS COMPUTER INTERNATIONAL  
E I S A - L 5 0 0

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	32-bit EISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

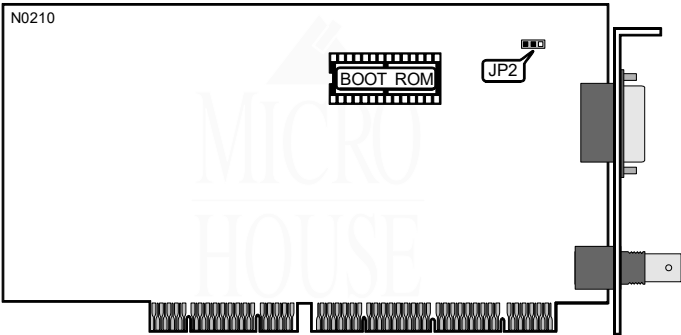

CABLE TYPE	
Type	JP2
RG-58A/U 50ohm coaxial	Pins 1 & 2 Closed
Software select	Pins 2 & 3 Closed
Note: The software setup option requires software provided by the manufacturer.	