


CABLETRON SYSTEMS, INC.

E1010/-X (Twisted Pair)

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Star
	Linear Bus
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Not available

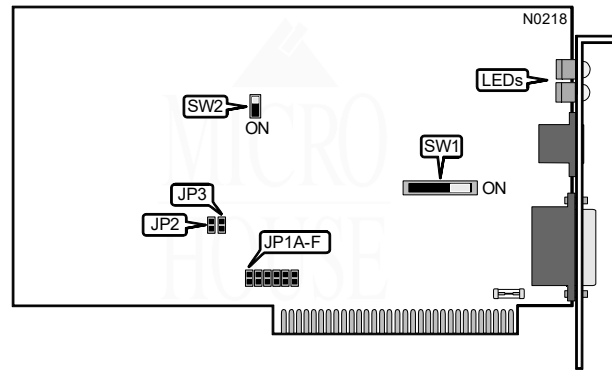

INTERRUPT REQUEST						
IRQ	JP1A	JP1B	JP1C	JP1D	JP1E	JP1F
2/9	Open	Open	Open	Open	Open	Closed
3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Closed	Open

I/O BASE ADDRESS		
Address	JP2	JP3
i220h	Closed	Closed
280h	Closed	Open
300h	Open	Closed
380h	Open	Open

CABLE TYPE	
Type	SW1
iUnshielded twisted pair	On
AUI transceiver via DB-15 port	Off


Continued on next page . . .

CABLETRON SYSTEMS, INC.

E1010/-X (Twisted Pair)

... continued from previous page

SIGNAL QUALITY ERROR (SQE) TEST	
Setting	SW2
Disabled	Off
Enabled	On
Note: Signal Quality Error (SQE) is a test of the collision circuitry and path.	



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
1	Green	On/Blinking	Data is being transmitted
1	Green	Off	Data is not being transmitted
2	Red	On/Blinking	Collision detected on network
2	Red	Off	Normal operation
3	Yellow	On/Blinking	Data is being received
3	Yellow	Off	Data is not being received
4	Green	On	Twisted pair network connection is good
4	Green	Off	Twisted pair network connection is broken