


# EFA CORPORATION

## EFA PNP 120

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	16KB
Boot ROM	Available
Network Transfer Rate	20Mbps
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver
	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA

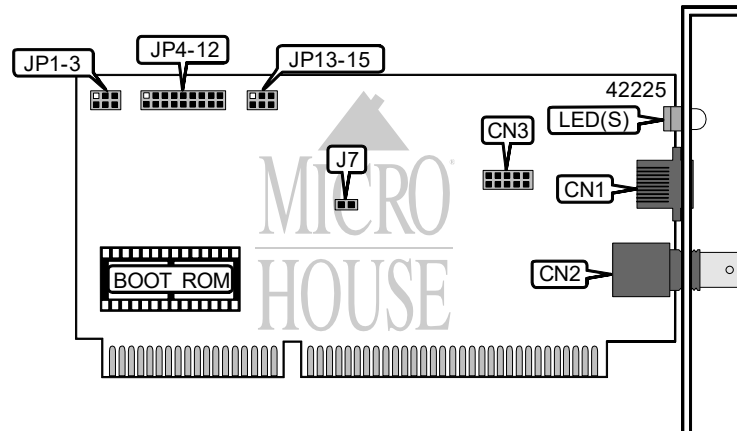

CONNECTIONS			
Function	Label	Function	Label
UTP via RJ-45 connector	CN1	AUI connector (adapter required)	CN3
RG-58A/U connector	CN2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
BNC enabled	J7	Closed	
AUI enabled	J7	Open	

CONFIGURATION MODE			
Function	JP1	JP2	JP3
Plug and Play mode enabled	Closed	Open	Open
Jumperless mode enabled	Open	Closed	Open
Jumper mode enabled	Open	Open	Closed

Continued on next page. . .

# EFA CORPORATION OF AMERICA

## EFA PNP 120

... continued from previous page

BASE I/O ADDRESS SELECTION				
Setting	JP9	JP10	JP11	JP12
300h	Open	Open	Open	Open
320h	Open	Open	Open	Closed
340h	Open	Open	Closed	Open
360h	Open	Open	Closed	Closed
380h	Closed	Open	Open	Open
3A0h	Closed	Open	Open	Closed
3C0h	Closed	Open	Closed	Open
3E0h	Closed	Open	Closed	Closed
200h	Open	Closed	Open	Open
220h	Open	Closed	Open	Closed
240h	Open	Closed	Closed	Open
260h	Open	Closed	Closed	Closed
280h	Closed	Closed	Open	Open
2A0h	Closed	Closed	Open	Closed
2C0h	Closed	Closed	Closed	Open
2E0h	Closed	Closed	Closed	Closed

INTERRUPT SELECTION			
IRQ	JP13	JP14	JP15
2/9	Open	Open	Open
3	Open	Open	Closed
4	Open	Closed	Open
5	Open	Closed	Closed
10	Closed	Open	Open
11	Closed	Open	Closed
12	Closed	Closed	Open
15	Closed	Closed	Closed

ROM ADDRESS/SIZE SELECTION					
Address/Size	JP4	JP5	JP6	JP7	JP8
Disabled	Open	Open	N/A	N/A	N/A
C000:0 32K	Open	Closed	Open	Open	Open
C800:0 32K	Open	Closed	Open	Open	Closed
D000:0 32K	Open	Closed	Open	Closed	Open
D800:0 32K	Open	Closed	Open	Closed	Closed
C000:0 64K	Open	Closed	Closed	Open	Open
D000:0 64K	Open	Closed	Closed	Open	Closed
C000:0 16K	Closed	Open	Open	Open	Open
C400:0 16K	Closed	Open	Open	Open	Closed
C800:0 16K	Closed	Open	Open	Closed	Open
CC00:0 16K	Closed	Open	Open	Closed	Closed
D000:0 16K	Closed	Open	Closed	Open	Open
D400:0 16K	Closed	Open	Closed	Open	Closed
D800:0 16K	Closed	Open	Closed	Closed	Open
DC00:0 16K	Closed	Open	Closed	Closed	Closed

Continued on next page. . .

EFA CORPORATION OF AMERICA  
EFA PNP 120

. . . continued from previous page

DIAGNOSTIC LED(S)
Note: Exact color, function, and location of LEDs is unidentified.