


CABLETRON SYSTEMS, INC.

E 2 1 1 0

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial
	Unshielded twisted pair
Boot ROM	Available

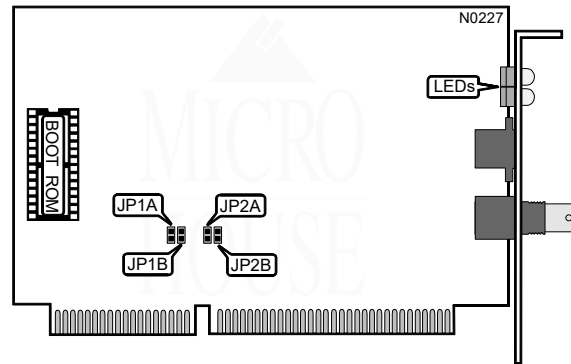


I/O BASE ADDRESS		
Address	JP1A	JP1B
i220h	Closed	Closed
280h	Closed	Open
300h	Open	Closed
380h	Open	Open

BOOT ROM ADDRESS		
Address	JP2A	JP2B
iDisabled	Open	Open
C0000h	Closed	Closed
D0000h	Open	Closed
E0000h	Closed	Open

Continued on next page . . .

... continued from previous page



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
1	Green	On/Blinking	Data is being transmitted
1	Green	Off	Data is not being transmitted
2	Red	On/Blinking	Collision detected on network
2	Red	Off	Normal operation
3	Yellow	On/Blinking	Data is being received
3	Yellow	Off	Data is not being received
4	Green	On	Card is receiving power
4	Green	Off	Card is not receiving power