


CABLETRON SYSTEMS, INC. E 3030/-X, E 3040/-X (Fiber Optic)

Transfer Rate 10Mbps
Data Bus 32-bit MCA
Topology Star
 Linear Bus
Wiring Type 200 μ fiber optic cable
 AUI transceiver via DB-15 port
Boot ROM Not Available

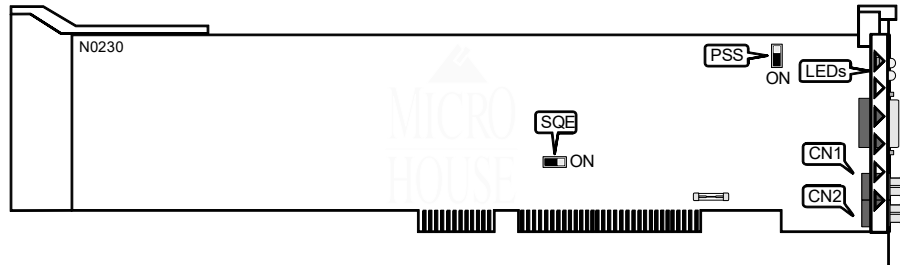


CONNECTIONS	
Purpose	Location
SMA 905 Receive Connector (gray)	CN1
SMA 905 Transmit Connector (black)	CN2

CABLE TYPE	
Type	Switch PSS
i200 μ fiber optic cable	On
AUI transceiver via DB-15 port	Off

Continued on next page . . .

... continued from previous page

SIGNAL QUALITY ERROR (SQE) TEST	
Setting	Switch SQE
Disabled	Off
Enabled	On
Note: Signal Quality Error (SQE) is a test of the collision circuitry and path.	



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
1	Green	On/Blinking	Data is being transmitted
1	Green	Off	Data is not being transmitted
2	Red	On/Blinking	Collision detected on network
2	Red	Off	Normal operation
3	Yellow	On/Blinking	Data is being received
3	Yellow	Off	Data is not being received
4	Green	On	Fiber optic network connection is good
4	Green	Off	Fiber optic network connection is broken