


DTK COMPUTER, INC.
PCI-003V2 TECH NET CARD

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear Bus
Wiring Type RG-58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

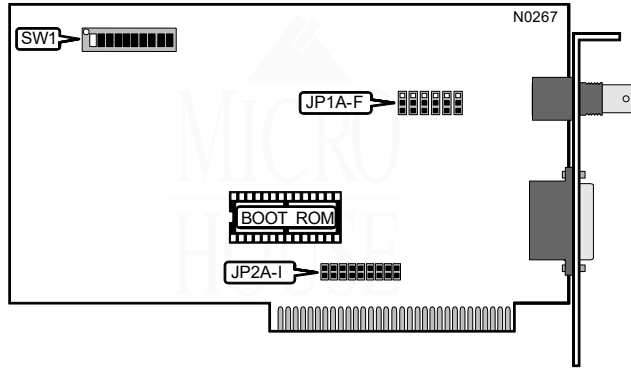

CABLE TYPE	
Type	JP1A - JP1F
RG-58A/U 50ohm coaxial	Pins 2 & 3 Closed
AUI transceiver via DB-15 port	Pins 1 & 2 Closed

INTERRUPT REQUEST					
IRQ	JP2A	JP2B	JP2C	JP2D	JP2E
2	Closed	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open
4	Open	Open	Closed	Open	Open
5	Open	Open	Open	Closed	Open
*5	Open	Open	Open	Open	Closed

Note: *This is an I/O fetch interrupt.

DMA CHANNEL				
Channel	JP2F	JP2G	JP2H	JP2I
DMA1	Closed	Open	Closed	Open
DMA3	Open	Closed	Open	Closed

Continued on next page . . .

DTK COMPUTER, INC.
PCI-003V2 TECH NET CARD

... continued from previous page

I/O BASE ADDRESS					
I/O	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
200h	Off	On	On	On	On
220h	Off	On	On	On	Off
i300h	Off	Off	On	On	On
320h	Off	Off	On	On	Off
3E0h	Off	Off	Off	Off	Off

BASE MEMORY ADDRESS				
Address	SW1/6	SW1/7	SW1/8	SW1/9
C0000h	On	On	On	On
C4000h	Off	On	On	On
iC8000h	On	Off	On	On
CC000h	Off	Off	On	On
D0000h	On	On	Off	On
D4000h	Off	On	Off	On
D8000h	On	Off	Off	On
DC000h	Off	Off	Off	On
E0000h	On	On	On	Off
E4000h	Off	On	On	Off
E8000h	On	Off	On	Off
EC000h	Off	Off	On	Off
F0000h	On	On	Off	Off
F4000h	Off	On	Off	Off
F8000h	On	Off	Off	Off
FC000h	Off	Off	Off	Off

BOOT ROM	
Setting	SW1/10
Disabled	Off
Enabled	On