


EDIMAX COMPUTER COMPANY

EN-2360 (Version 2.0)

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear Bus
Wiring Type	RG-58A/U 50ohm coaxial AUI transceiver via DB-15 port
Boot ROM	Available

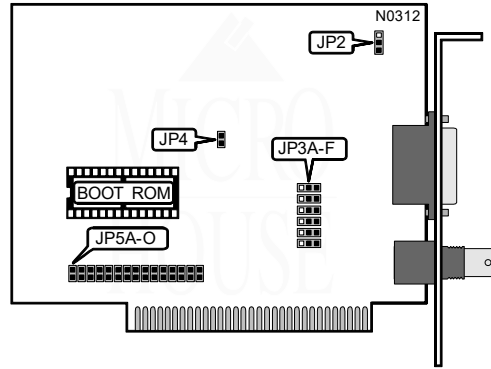

CABLE TYPE		
Type	JP2	JP3A-JP3F
iRG-58A/U 50ohm coaxial	Pins 2 & 3 closed	Pins 2 & 3 closed
AUI transceiver via DB-15 port	Pins 1 & 2 closed	Pins 1 & 2 closed

BOOT ROM	
Setting	JP4
iDisabled	Open
Enabled	Closed

I/O BASE ADDRESS			
Address	JP5A	JP5B	JP5C
i300h	Closed	Closed	Closed
320h	Closed	Closed	Open
340h	Closed	Open	Closed
360h	Closed	Open	Open

Continued on next page . . .

INTERRUPT SETTINGS				
IRQ	JP5D	JP5E	JP5F	JP5G
2/9	Closed	Open	Open	Open
i3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

DMA CHANNEL				
Channel	JP5H	JP5I	JP5J	JP5K
iDisabled	Open	Open	Open	Open
DMA1	Closed	Open	Closed	Open
DMA3	Open	Closed	Open	Closed

BOOT ROM ADDRESS				
Address	JP5L	JP5M	JP5N	JP5O
C0000h	Closed	Closed	Closed	Closed
C4000h	Open	Closed	Closed	Closed
iC8000h	Closed	Open	Closed	Closed
CC000h	Open	Open	Closed	Closed
D0000h	Closed	Closed	Open	Closed
D4000h	Open	Closed	Open	Closed
D8000h	Closed	Open	Open	Closed
DC000h	Open	Open	Open	Closed