


PEAKTRON COMPUTER, INC. PLENTY PERI III

Card Type	Multi I/O card
Chipset/Controller	N/A
I/O Options	Floppy drive interface, game port, parallel port, serial ports (2)
Maximum DRAM	N/A

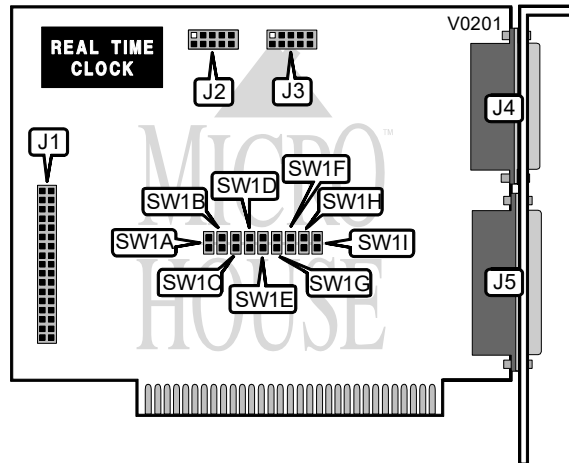

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy drive interface	J1	Game port	J4
Serial port 2	J2	Parallel port	J5
Serial port 1	J3		

REAL TIME CLOCK CONFIGURATION	
Setting	SW1A
Enabled	Open
Disabled	Closed

SERIAL PORT CONFIGURATION				
Port 1 (J3)	Port 2 (J2)	SW1B	SW1C	SW1D
COM1	COM2	Open	Open	Open
COM1	Disabled	Closed	Closed	Open
COM2	Disabled	Closed	Open	Closed
2B0h	2B8h	Open	Closed	Closed
2E0h	2E8h	Open	Closed	Open
3E0h	3E8h	Open	Open	Closed
Disabled	Disabled	Closed	Closed	Closed

Note: Address hex 2B0h, 2B8h, 2E0h, 2E8h, 3E0h and 3E8h can be used as COM3 - COM8 with some software.

Continued on next page . . .

PEAKTRON COMPUTER, INC.
PLENTY PERI III

... continued from previous page

PARALLEL PORT CONFIGURATION		
LP1	SW1E	SW1F
1	Open	Open
2	Open	Closed
3	Closed	Open
Disabled	Closed	Closed

FLOPPY DRIVE CONFIGURATION		
Driv	SW1C	SW1H
Enabled	Open	Open
Disabled	Open	Closed

GAME PORT SELECTION	
Port	SW1I
Enabled	Open
Disabled	Closed