


DIAMOND FLOWER, INC.

DIO-200X

Card Type
Chipset/Controller
I/O Options
Maximum DRAM

Multi I/O card
 Unidentified
 Clock, game port, parallel port, serial ports (2)
 N/A

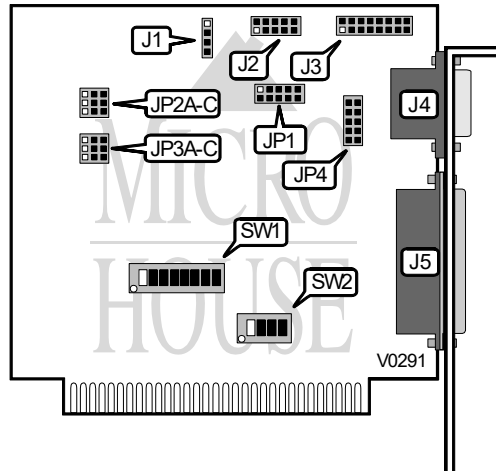

CONNECTIONS			
Purpose :	Location	Purpose :	Location
Clock/calendar battery connector	J1	Serial port 1	J4
Serial port 2	J2	Parallel port	J5
Game port	J3		

SERIAL PORT CONFIGURATION			
Port 1 (J4)	Port 2 (J2)	SW1/2	SW2/3
if COM1	if Disabled	On	Off
COM1	COM2	Off	Off
COM2	COM3	Off	On
COM3	COM4	On	On

SERIAL PORT INTERRUPT SELECT		
Port 1 (J4)	SW1/2	SW2/3
if IRQ4	Off	On
IRQ3	On	Off

Continued on next page . . .

DIAMOND FLOWER, INC.
DIO-200X

... continued from previous page

SERIAL PORT INTERRUPT SELECT		
Port 2 I2)	SW1/	SW1/
í IRQ3	On	Off
IRQ4	Off	On

PARALLEL PORT CONFIGURATION	
LPT	SW2/1
í 1	Off
2	On

PARALLEL PORT INTERRUPT SELECT		
IRC	SW1/	SW1/
í IRQ7	On	Off
IRQ5	Off	On

NORMAL/FORCED TRUE CONFIGURATION							
Port 1	Port 2	JP3/A	JP3/B	JP3/C	JP2/A	JP2/B	JP2/C
Normal	Normal	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2	Pins 1 & 2
Forced true	Forced true	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3	Pins 2 & 3
Note: Pins designated should be in the closed position.							

SERIAL PORT'S DTE/DCE CONFIGURATION			
Primary serial port Jumper JP4		Secondary serial port Jumper JP1	
1 TX	1 TX	1 TX	1 TX
RD	RD	RD	RD
RTS	RTS	RTS	RTS
CTS	CTS	CTS	CTS
9 DTR	9 DTR	9 DTR	9 DTR
DTE	DCE	DTE	DCE

CLOCK/CALENDER CONFIGURATION	
Port	SW2/4
í Enabled	On
Disabled	Off

CLOCK/CALENDER INTERRUPT SELECTION		
IRC	SW1/	SW1/
í IRQ2	Off	On
IRQ5	On	Off