


# GVC TECHNOLOGIES, INC.

## NIC - 1000 B

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	8-bit ISA
<b>Topology</b>	Linear Bus
<b>Wiring Type</b>	RG58A/U 50ohm coaxial AUI transceiver via DB-15 port
<b>Boot ROM</b>	Available

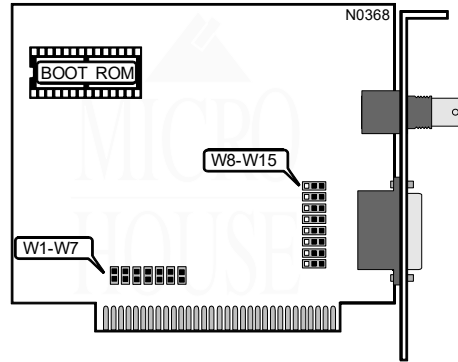

BOOT ROM	
Setting	W1
Disabled	Open
Enabled	Closed

I/O BASE ADDRESS AND BOOT ROM ADDRESS			
I/O address	Boot ROM Address	V2	V3
300-31Fh	C8000-CBFFFh	Closed	Closed
320-33Fh	CC000-CFFFFh	Open	Closed
340-35Fh	D0000-D3FFFh	Closed	Open
360-37Fh	D4000-D7FFFh	Open	Open

INTERRUPT REQUEST				
IRQ	W4	W5	W6	W7
2	Open	Open	Open	Closed
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open

CABLE TYPE	
Type	W8 - W15
RG58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed