


ARNET CORPORATION
ARNET SYNC

Card Type
Chipset/Controller
I/O Options
Maximum DRAM

I/O controller
Unidentified
Serial ports (2)
N/A

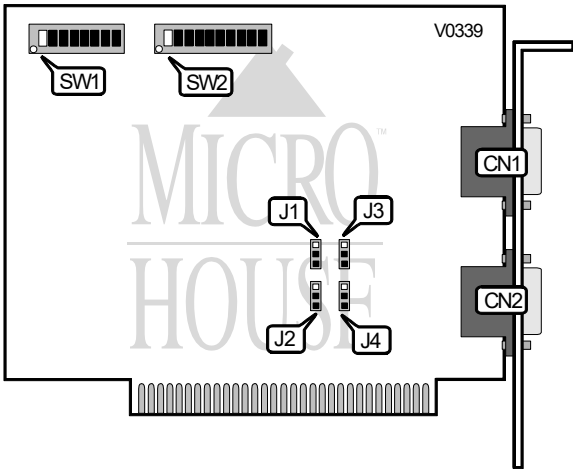

CONNECTIONS			
Position	Location	Position	Location
Serial port 1	CN1	Serial port 2	CN1

I/O ADDRESS CONFIGURATION								
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
1388h	Off	On	On	On	Off	Off	Off	On
100h	On	On	On	On	On	Off	On	On
120h	On	On	Off	On	On	Off	On	On
140h	On	On	On	Off	On	Off	On	On
168h	Off	On	Off	Off	On	Off	On	On
200h	On	On	On	On	On	On	Off	On
2C0h	On	On	On	Off	Off	On	Off	On
2D0h	On	Off	On	Off	Off	On	Off	On
2F8h	Off	Off	Off	Off	Off	On	Off	On
300h	On	On	On	On	On	Off	Off	On
310h	On	Off	On	On	On	Off	Off	On
380h	On	On	On	On	Off	Off	Off	On
3A0h	On	On	Off	On	Off	Off	Off	On
3A8h	Off	On	Off	On	Off	Off	Off	On
3F8h	Off	Off	Off	Off	Off	Off	Off	On

Continued on next page . . .

ARNET CORPORATION
ARNET SYNC

... continued from previous page

INTERRUPT SELECT										
IRQ	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW2/8	SW2/9	SW2/10
2	On	Off	Off	Off	Off	Off	Off	Off	Off	Off
3	Off	On	Off	Off	Off	Off	Off	Off	Off	Off
4	Off	Off	On	Off	Off	Off	Off	Off	Off	Off
5	Off	Off	Off	On	Off	Off	Off	Off	Off	Off
6	Off	Off	Off	Off	On	Off	Off	Off	Off	Off
7	Off	Off	Off	Off	Off	On	Off	Off	Off	Off

DTR CONFIGURATION		
Setting	J2	J4
if DTR selected from 8530	Pins 1 & 2 closed	Pins 1 & 2 closed
DTR selected from I/O latch	Pins 2 & 3 closed	Pins 2 & 3 closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
J1	Pins 2 & 3 closed
J3	Pins 2 & 3 closed