


MICRODYNE CORPORATION S-NET NIC (REV. H & LATER)

NIC Type S-Net
Transfer Rate 300/600Kbps
Data Bus 8-bit ISA
Topology Star
Wiring Type Belden 9184
 Belden 9302
 DSCC EDC4
 IBM Type 1
Boot ROM Available

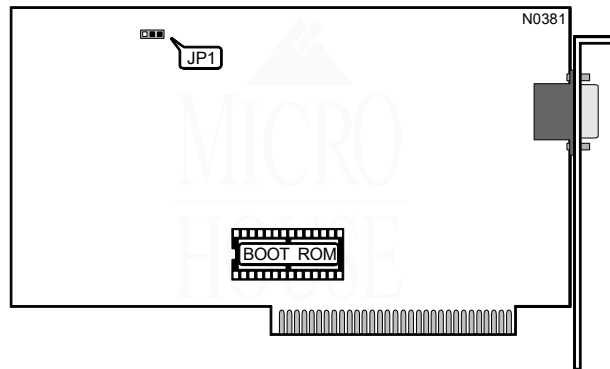

NETWORK SPEED	
Speed	JP1
300Kbps	Pins 2 & 3 closed
600Kbps	Pins 1 & 2 closed
Note: The LAN speed must match that of the 68B server.	

MISCELLANEOUS NOTES
Rev.s E & G have solder pads in place of jumper JP1. The configuration is identical except instead of moving a jumper to set the speed, you must desolder and resolder the center pad with the proper side pad