


MICRODYNE CORPORATION

S-NET INTELLIGENT NIC

NIC Type	S-Net
Transfer Rate	300/600Kbps
Data Bus	8-bit ISA
Topology	Star
Wiring Type	Belden 9184 Belden 9302 DSCC EDC4 IBM Type 1
Boot ROM	Available

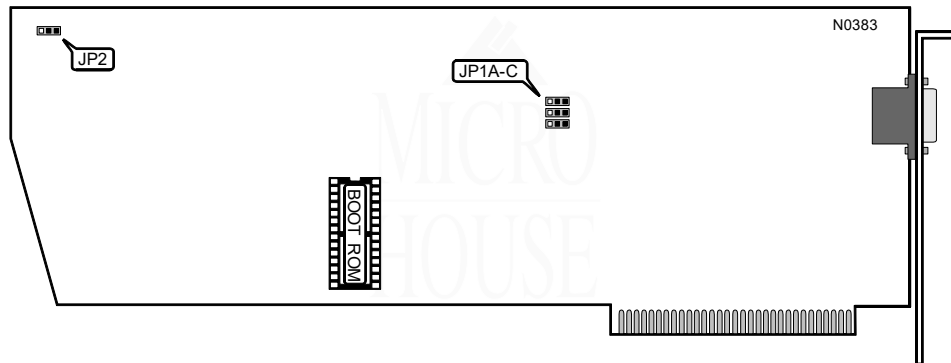

NETWORK SPEED	
Speed	JP1A
600Kbps	Pins 1 & 2 closed
300Kbps	Pins 2 & 3 closed
Note: The LAN speed must match that of the 68B server.	

I/O BASE ADDRESS & BASE MEMORY ADDRESS			
I/O Address	Base Memory Address	JP1B	JP1C
2B8h	D0000h	Pins 2 & 3 closed	Pins 2 & 3 closed
2BCh	D0000h	Pins 1 & 2 closed	Pins 1 & 2 closed
358h	D4000h	Pins 2 & 3 closed	Pins 1 & 2 closed
35Ch	D8000h	Pins 1 & 2 closed	Pins 2 & 3 closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP2	Unused