


ACCTON TECHNOLOGY CORPORATION

RINGPAIR-MC4/16 (TR1616)

| | |
|----------------------|--|
| NIC Type | Token-Ring |
| Transfer Rate | 4/16Mbps |
| Data Bus | 16-bit MCA |
| Topology | Ring |
| Wiring Type | Unshielded twisted pair Shielded twisted pair (DB-9 port) |
| Boot ROM | Not available |

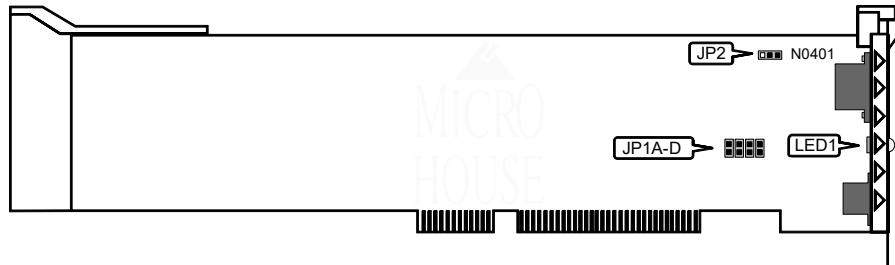

| CABLE TYPE | |
|-----------------------------------|-------------|
| Type | JP1A - JP1D |
| Shielded twisted pair (DB-9 port) | Open |
| Unshielded twisted pair | Closed |

| NETWORK SEGMENT SPEED | |
|-----------------------|-------------------|
| Speed | JP2 |
| 16Mbps | Pins 2 & 3 closed |
| 4Mbps | Pins 1 & 2 closed |

Note: All cards on the network segment must have this option set the same.

| DIAGNOSTIC LED(S) | | | |
|-------------------|-------|--------|------------------------------|
| LED | Color | Status | Condition |
| LED1 | Green | On | Network connection at 16Mbps |
| LED1 | Red | On | Network connection at 4Mbps |
| LED1 | N/A | Off | Network connection is broken |

Note: LED1 is a two color LED.