


# DTK COMPUTER, INC. P11-144

<b>Card Type</b>	Multi-I/O
<b>Chipset/Controller</b>	Unidentified
<b>I/O Options</b>	Game port, parallel port, serial ports (2)
<b>Maximum DRAM</b>	N/A

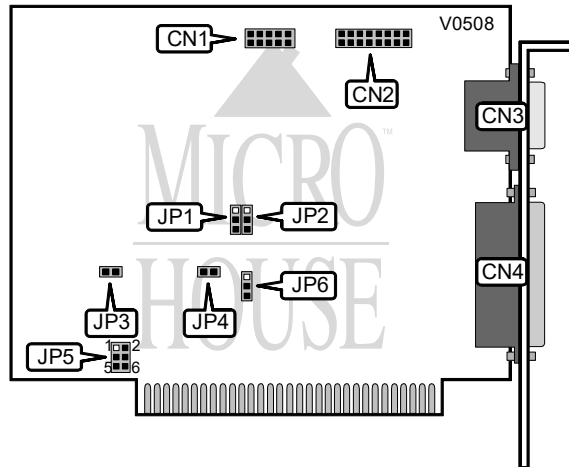

CONNECTIONS			
Purpose :	Location	Purpose :	Location
Serial port 2	CN1	Serial port 1	CN3
Game port	CN2	Parallel port	CN4

SERIAL PORT CONFIGURATION					
Port 1	Port 2	System Port	JP1	JP2	JP5
COM1	COM2	N/A	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 3, 4 & 6 closed
COM2	COM1	N/A	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 4, 3 & 5 closed
COM1	N/A	COM2	Pins 2 & 3 closed	N/A	Pins 1 & 3
COM2	N/A	COM1	Pins 1 & 2 closed	N/A	Pins 3 & 5

PARALLEL PORT CONFIGURATION	
LPT	JP3
LPT1	Open
LPT2	Closed
Note: CN4 on the P11-144 card defaults to LPT2 with JP3 open and an IBM Monochrome/Printer Adapter card installed. CN4 uses LPT3 with JP3 closed and an IBM Monochrome /Printer Adapter card installed	

Continued on next page . . .

... continued from previous page

GAME PORT	
Setting	JP4
i Enabled	Closed
Disabled	Open

CLOCK/CALENDAR CONFIGURATION	
Setting	JP6
i Clock 1	Pins 2 & 3 closed
Clock 2	Pins 1 & 2 closed