

THE NETWORK INTERFACE CARD TECHNICAL GUIDE

HEWLETT-PACKARD COMPANY

HP 27245A PC LAN ADAPTER/8 TP

NIC Type

Transfer Rate

Data Bus

Topology

Wiring Type

Boot ROM

Ethernet


10Mbps

8-bit ISA

Star

Shielded/Unshielded twisted pair

Not available

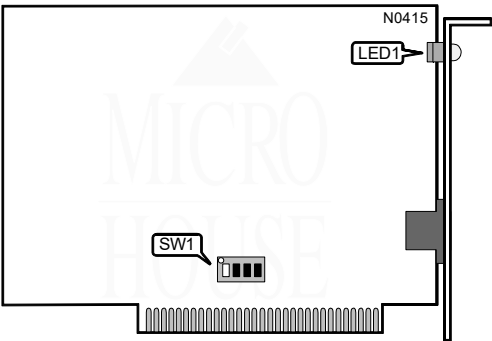

I/O BASE ADDRESS			
Address	SW1/1	SW1/2	SW1/3
200 - 21Fh	Off	Off	Off
240 - 25Fh	Off	Off	On
280 - 29Fh	Off	On	Off
2C0 - 2DFh	Off	On	On
300 - 31Fh	On	Off	Off
320 - 33Fh	On	Off	On
340 - 35Fh	On	On	Off

LINK INTEGRITY TEST	
Setting	SW1/4
iEnabled	On
Disabled	Closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Twisted pair network connection is good
LED1	Green	Off	Twisted pair network connection is broken