


OMNITEL, INC.
T 1 2 0 0 - P C 4

Modem Type	Data (Asynchronous/Synchronous)
Maximum Data Rate	1200 bps
Maximum Fax Rate	N/A
Data Bus	8-bit ISA
Fax Class	N/A
Data Modulation Protocol	Bell 212A, CCITT V.22bis & V.22
Fax Modulation Protocol	N/A
Error Correction/Compression	Unidentified

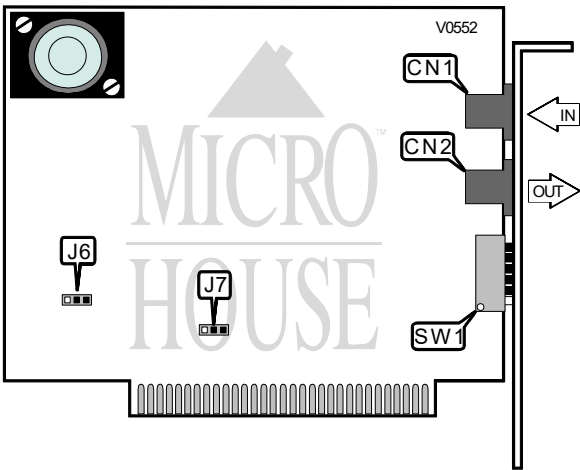

CONNECTIONS			
Purpose	Location	Purpose	Location
Line in	CN1	Line out	CN2

COM PORT CONFIGURATIONS		
COM #	SW1/1	SW1/2
COM1	On	On
COM2	On	Off
COM3	Off	On
COM4	Off	Off

DATA TERMINAL READY - DTR	
Setting	SW1/3
Disabled	Off
Enabled	On

CARRIER DETECT - CD	
Setting	SW1/4
Disabled	Off
Enabled	On

Continued on next page . . .

OMNITEL, INC.
T1200-PC4

... continued from previous page

FACTORY CONFIGURED SETTINGS	
Switch	Setting
SW1/5	Off
SW1/6	Off

INTERUPT SELECT		
Setting	J	J
IRQ2	N/A	Pins 2 & 3 closed
IRQ3	N/A	Pins 1 & 2 closed
IRQ4	Pins 1 & 2 closed	N/A
IRQ5	Pins 2 & 3 closed	N/A

PROPRIETARY COMMAND SET		
Type:	Configuration	
Format:	ATS(register)=(Command Value)	
Example:	ATS16=1A	
Description:	Writes to or reads from a specified register.	
Register	Command Value	Function
S16	1A	Answer mode enabled.
S16	1D	Dialing Test: Tests the ability of the modem to dial a telephone number.
S18	0&T8	Connection Test: Audible tones indicate a connection is being established. "Connect" or "Connect 1200" is displayed. Next the modem generates a string of uppercase U's, looped back, and received by the modem.