



# CABLETRON SYSTEMS, INC.

## T 3 0 1 5

<b>NIC Type</b>	Token-Ring
<b>Transfer Rate</b>	4/16Mbps
<b>Data Bus</b>	16-bit MCA
<b>Topology</b>	Ring
<b>Wiring Type</b>	Unshielded twisted pair
	Shielded twisted pair (DB-9 port)
<b>Boot ROM</b>	Not available

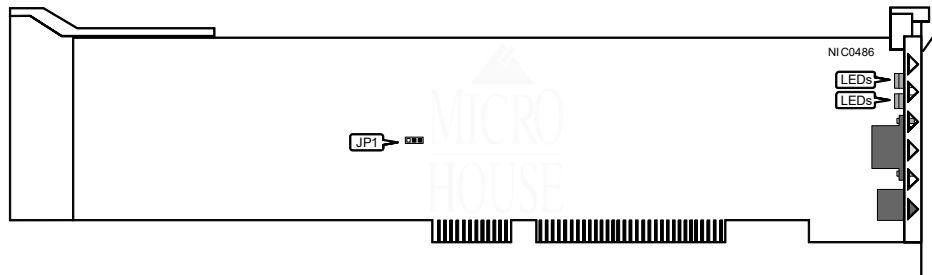

MODEL SELECT	
Model	JP1
PS/2 Model 50	Pins 1 & 2 closed
PS/2 Model 70 or Model 80	Pins 2 & 3 closed



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Data is being transmitted or received
LED1	Yellow	Off	Data is not being transmitted or received
LED2	Green	On	Twisted pair network connection is good
LED2	Red	On	Twisted pair network connection is broken
LED3	Green	On	Card is set to 4Mbps operation
LED4	Yellow	On	Card is set to 16Mbps operation
Note: LED2 is a two color LED. LED2 will light red when power is first applied to the card.			