


# TECMAR GRAPHICS MASTER

<b>Category</b>	Video
<b>Video Types Supported</b>	VGA
<b>Video Processor</b>	82C451
<b>Highest Resolution Supported</b>	640 x 480
<b>Data Bus Type</b>	16-bit ISA
<b>Memory Type</b>	VRAM
<b>Maximum Onboard Memory</b>	Unidentified

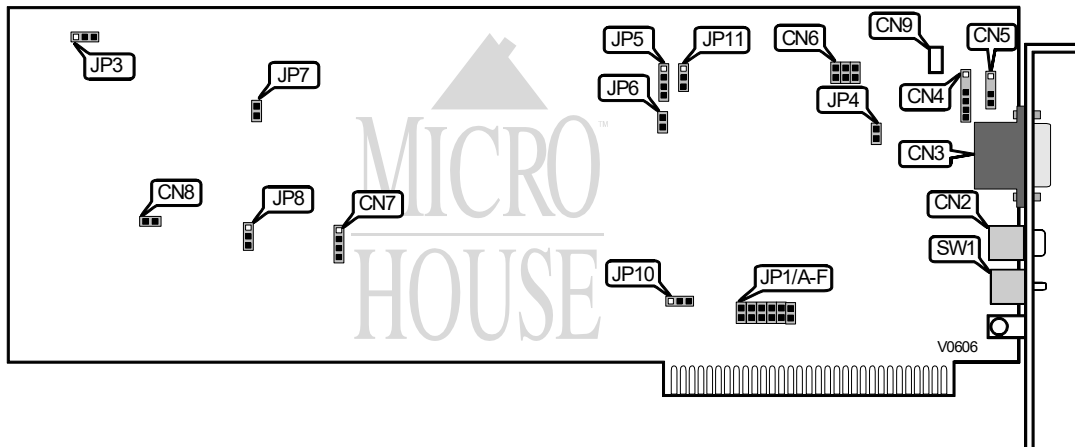

CONNECTIONS			
Purpos	Location	Purpos	Location
RCA Jack connector	CN2	External Sync Connector	CN6
9-pin IBM Mono/RGB connector	CN3	Not Used	CN7
Light pen Connector	CN4	Not Used	CN8
RF Modulator Connector	CN5	Composite signal intensity regulator	CN9

MONITOR TYPE CONFIGURATION						
First Monitor	First Adapter	Second Monitor	Second Adapter	SW1	JP7	JP1/A
Standard IBM PC	Graphics Master	IBM mono	IBM mono	Down	Open	Closed
Standard IBM PC	Graphics Master	Mono	Mono	Up	Closed	Closed
Standard	IBM color	IBM mono	Graphics Master	Up	Closed	Open
IBM mono	IBM mono	Standard	Graphics Master	Down	Open	Closed
Standard	IBM color	Any	Graphics Master	Up	Closed	Open

Continued on next page. . .

# TECMAR GRAPHICS MASTER

...continued from previous page

MONITOR TYPE CONFIGURATION (CONTINUED)						
First Monitor	First Adapter	Second Monitor	Second Adapter	JP1/B	JP1/C	JP1/D
Standard IBM PC	Graphics Master	IBM mono	IBM mono	Closed	Closed	Open
Standard IBM PC	Graphics Master	Mono	Mono	Closed	Closed	Open
Standard	IBM color	IBM mono	Graphics Master	Closed	Closed	Open
IBM mono	IBM mono	Standard	Graphics Master	Open	Closed	Open
Standard	IBM color	Any	Graphics Master	Open	Closed	Open

MONITOR TYPE CONFIGURATION (CONTINUED)					
First Monitor	First Adapter	Second Monitor	Second Adapter	JP1/E	JP1/F
Standard IBM PC	Graphics Master	IBM mono	IBM mono	Open	Open
Standard IBM PC	Graphics Master	Mono	Mono	Open	Open
Standard	IBM color	IBM mono	Graphics Master	Open	Open
IBM mono	IBM mono	Standard	Graphics Master	Open	Open
Standard	IBM color	Any	Graphics Master	Open	Open

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP3	Do not modify
JP4	Do not modify
JP5	Pins 1 & 2 Closed
JP8	Open
JP10	Do not modify
JP11	Do not modify

HARDWARE COLOR BURST	
Setting	JP6
Hardware color burst enabled	Open
Hardware color burst disabled (Standard Monitor)	Closed