


AST RESEARCH, INC.
G-9 SIX PAK PLUS

Card Type	Memory Expansion
Chipset Controller	Unidentified
I/O Options	(1) Parallel, (2) Serial
Maximum Dram	384KB

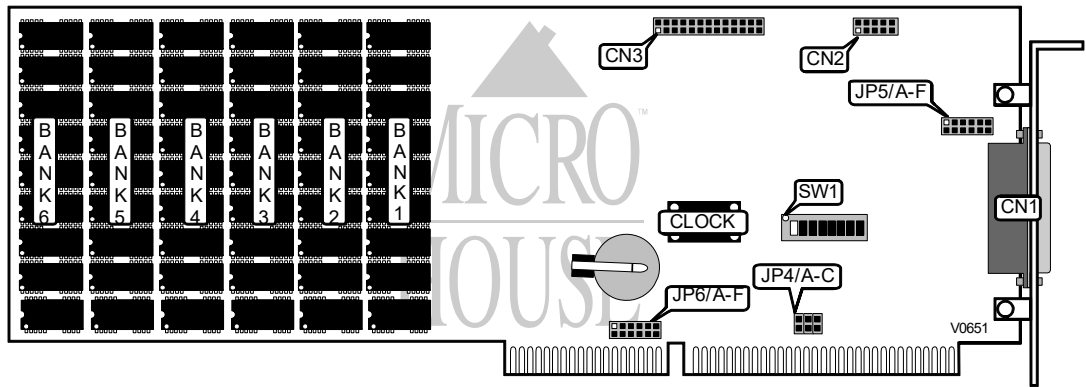

CONNECTIONS			
Purpose	Location	Purpose	Location
25-pin serial port external	CN1	25-pin parallel port	CN3
9-pin serial port Internal	CN2		

USER CONFIGURABLE SETTING		
Purpose	Jumper	Setting
COM1 enabled	JP6/A	Closed
COM1 disabled	JP6/A	Open
COM2 enabled	JP6/B	Closed
COM2 disabled	JP6/B	Open
LPT1 enabled	JP6/C	Closed
LPT1 disabled	JP6/C	Open
LPT2 enabled	JP6/D	Closed
LPT2 disabled	JP6/D	Open
Note: COM settings refer only to CN1.		

Continued on next page...

AST RESEARCH, INC.
G-9 SIX PAK PLUS

...continued from previous page

USER CONFIGURABLE SETTINGS (CONTINUED)		
Purpose	Jumpers	Setting
Game port enabled	JP6/E	Closed
Game port disabled	JP6/E	Open
Clock enabled	JP6/F	Closed
Clock disabled	JP6/F	Open
Not Used	SW1/7	N/A
Parity enabled	SW1/8	On
Parity disabled	SW1/8	Off

DRAM CONFIGURATION				
Starting Address	Board RAM	SW1/1	SW1/2	SW1/3
64KB	384KB	Off	Off	Off
128KB	384KB	Off	Off	On
192KB	384KB	Off	On	Off
256KB	384KB	Off	On	On
320KB	320KB	On	Off	Off
384KB	256KB	On	Off	On
448KB	192KB	On	On	Off
512KB	128KB	On	On	On

BANK CONFIGURATION				
Banks Installed	Board RAM	SW1/4	SW1/5	SW1/6
None	0KB	Off	Off	Off
1	64KB	Off	Off	On
1 & 2	128KB	Off	On	Off
1 & 2 & 3	192KB	Off	On	On
1 & 2 & 3 & 4	256KB	On	Off	Off
1 & 2 & 3 & 4 & 5	320KB	On	Off	On
All Banks	384KB	On	On	Off

DRAM CONFIGURATION						
Size	Bank 1	Bank 2	Bank 3	Bank 4	Bank 5	Bank 6
64KB	(9) 64K x 1	NONE	NONE	NONE	NONE	NONE
128KB	(9) 64K x 1	(9) 64K x 1	NONE	NONE	NONE	NONE
192KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	NONE	NONE	NONE
256KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	NONE	NONE
320KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	NONE
384KB	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1	(9) 64K x 1

Continued on next page. . .

AST RESEARCH, INC.
G-9 SIX PAK PLUS

...continued from previous page

SERIAL PORT 1 CONFIGURATION		
Function	JP5/A	JP5/E
Force CTS true	Closed	Open
CTS normal	Open	Closed

SERIAL PORT 1 CONFIGURATION (CONTINUED)		
Function	JP5/C	JP5/D
Force DSR true	Closed	Open
DSR normal	Open	Closed

SERIAL PORT 1 CONFIGURATION (CONTINUED)		
Function	JP5/E	JP5/F
Force DCD true	Closed	Open
DCD normal	Open	Closed

COM PORT INTERRUPT CONFIGURATION		
Function	JP4/A	JP4/B
COM1 & IRQ4	Open	Closed
COM2 & IRQ3	Closed	Open

COM PORT INTERRUPT CONFIGURATION	
Function	JP4/C
LPT1 - IRQ7 enable	Closed
LPT1 - IRQ7 disable	Open