


VIVA COMPUTER COMPANY
DUAL SERIAL CARD

Card Type
Chipset Controller
I/O Options
Maximum Dram

Serial
Unidentified
Serial port (2)
N/A

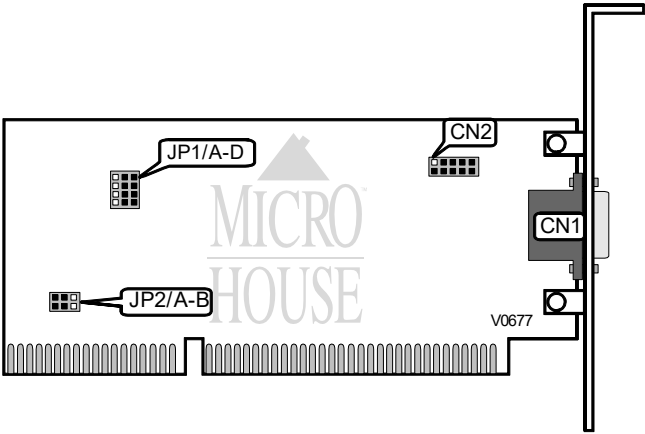

CONNECTIONS			
Purpose	Location	Purpose	Location
9-pin serial port	CN1	10-pin serial port	CN2

SERIAL PORT 1 SELECT				
COM	JP1/A	JP1/B	JP1/C	JP1/D
COM1	Pins 1 & 2 closed	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open
COM2	Pins 1 & 2 open	Pins 1 & 2 closed	Pins 1 & 2 open	Pins 1 & 2 open
COM3	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 closed	Pins 1 & 2 open
COM4	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 closed

SERIAL PORT 2 SELECT				
COM	JP1/A	JP1/B	JP1/C	JP1/D
COM1	Pins 2 & 3 closed	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open
COM2	Pins 2 & 3 open	Pins 2 & 3 closed	Pins 2 & 3 open	Pins 2 & 3 open
COM3	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 closed	Pins 2 & 3 open
COM4	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 closed

Continued on next page. . .

VIVA COMPUTER COMPANY
DUAL SERIAL CARD

...continued from previous page

SERIAL PORT 1 SELECT	
IRQ	JP2/A
i IRQ3	Pins 2 & 3 open
IRQ4	Pins 1 & 2 closed

SERIAL PORT 2 SELECT	
IRQ	JP2/B
i IRQ4	Pins 1 & 2 closed
IRQ3	Pins 2 & 3 open