


ANSEL COMMUNICATIONS, INC. **NC2000 REV. D**

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8/16-bit ISA
Topology	Star
	Linear bus
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
	AUI transceiver via DB-15 port
Boot ROM	Available

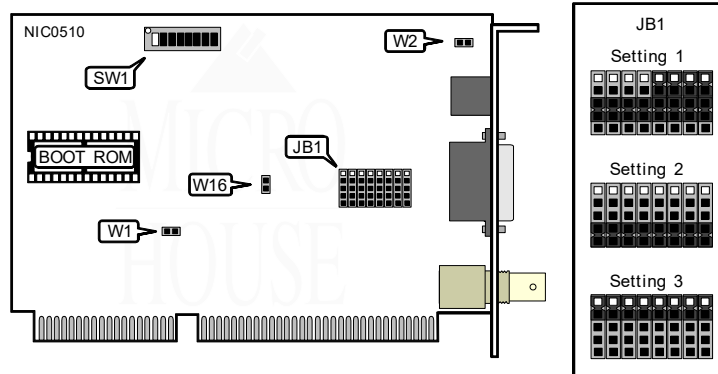

CABLE TYPE	
Type	JB1
Unshielded twisted pair	Setting 1
RG-58A/U 50ohm coaxial	Setting 2
AUI transceiver via DB-15 port	Setting 3
Note: See the diagram for an illustration of the settings.	

I/O BASE ADDRESS		
Address	SW1/1	SW1/2
300h	On	On
320h	On	Off
340h	Off	On
360h	Off	Off

Continued on next page . . .

ANSEL COMMUNICATIONS, INC.
NC2000 REV. D

... continued from previous page

BOOT ROM ADDRESS		
Address	SW1/3	SW1/4
C8000h	On	On
CC000h	On	Off
D0000h	Off	On
D4000h	Off	Off

INTERRUPT REQUEST				
IRQ	SW1/5	SW1/6	SW1/7	SW1/8
2/9	On	Off	Off	Off
i3	Off	Off	Off	On
4	Off	Off	On	Off
5	Off	On	Off	Off

BOOT ROM	
Setting	W1
iDisabled	Open
Enabled	Closed

LINK INTEGRITY TEST	
Setting	W2
iEnabled	Closed
Disabled	Open
Note: The link integrity test is only valid when the cable type is unshielded twisted pair.	

COMPATIBILITY MODE	
Setting	W16
iDisabled	Open
Enabled	Closed
Note: You must enable compatibility mode if the card is installed in one of the following systems: Compaq 286 Portable, IBM PC Model 30, or a clone using a Chips & Technologies chipset.	