HEWLETT-PACKARD COMPANY
HP 27248A ETHERTWIST

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	32-bit EISA
Topology	Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Available
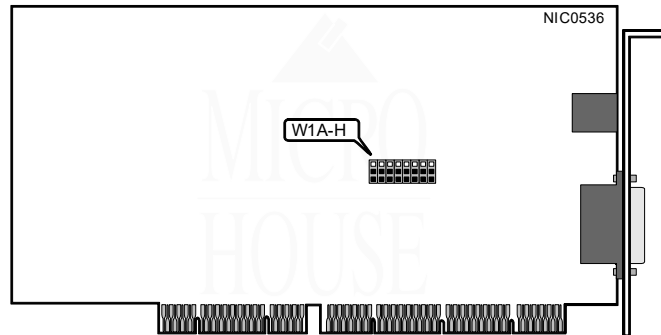
CABLE TYPE	
Type	W1A - W1H
íRG-58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed
Note: All other settings are done using the setup utility included with the card.	