


UNIDENTIFIED RTA-03H

Card Type
Chipset/Controller
I/O Options
Maximum DRAM

Multi-I/O
Unidentified
Parallel ports (2), serial ports (2)
N/A

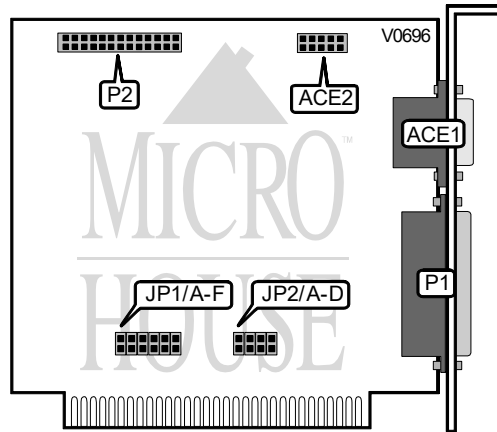

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port 1 - external	P1	Serial port 2 - internal	ACE2
Serial port 1 - external	ACE1	Parallel port 2 - internal	P2

SERIAL PORT 1 CONFIGURATION - JP1			
COM/Address	Jumper 1	Jumper 2	
COM1/3F8h	Closed	Open	
COM3/3E8h	Open	Closed	
Disabled	Open	Open	

SERIAL PORT 2 CONFIGURATION - JP1			
COM/Address	Jumper 3	Jumper 4	
COM2/2F8	Closed	Open	
COM4/2E8h	Open	Closed	
Disabled	Open	Open	

PARALLEL PORT 1 CONFIGURATION - JP1			
LPT/Address/IRQ	Jumper E		
LPT2/378h/IRQ7	Closed		
Disabled	Open		

Continued on next page...

UNIDENTIFIED
RTA-03H

...continued from previous page

PARALLEL PORT 2 CONFIGURATION - JP1	
LPT/Address/IRQ	Jumper F
i LPT3/278h/IRQ5	Closed
Disabled	Open

SERIAL PORT 1 INTERRUPT SELECT - JP2		
IRQ	Jumper 1	Jumper 3
IRQ3	Closed	Open
IRQ4	Open	Closed
Disabled	Open	Open

SERIAL PORT 2 INTERRUPT SELECT - JP2		
IRQ	Jumper 2	Jumper 3
IRQ3	Open	Closed
IRQ4	Closed	Open
Disabled	Open	Open

MISCELLANEOUS TECHNICAL NOTES	
Serial ports 1 & 2 must have different IRQs selected.	