


XINETRON, INC.
X1301

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear bus
Wiring Type AUI transceiver via DB-15 port
 RG-58A/U 50ohm coaxial
Boot ROM Available

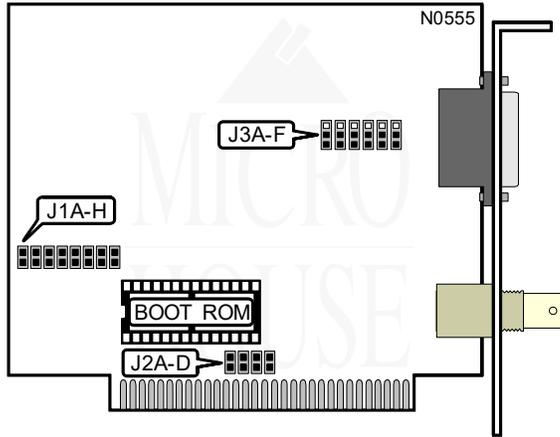

BOOT ROM ADDRESS				
Address	J1A	J1B	J1C	J1D
C000h	Closed	Closed	Closed	Closed
C400h	Closed	Closed	Closed	Open
iC800h	Closed	Closed	Open	Closed
CC00h	Closed	Closed	Open	Open
D000h	Closed	Open	Closed	Closed

I/O BASE ADDRESS				
Address	J1E	J1F	J1G	J1H
i300 - 31Fh	Open	Closed	Closed	Closed
320 - 33Fh	Open	Closed	Closed	Open
340 - 35Fh	Open	Closed	Open	Closed
360 - 37Fh	Open	Closed	Open	Open

Continued on next page . . .

XINETRON, INC.
X1301

... continued from previous page

INTERRUPT REQUEST				
IRQ	J2A	J2B	J2C	J2D
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

CABLE TYPE	
Type	J3A - J3F
IRG-58A/U 50ohm coaxial	Pins 2 & 3 closed
AUI transceiver via DB-15 port	Pins 1 & 2 closed