


COMPEX, INC. ENET16-MC/P

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	MCA
Topology	Linear bus/Star
Wiring Type	Shielded/Unshielded Twisted Pair
	RG-58A/U 50ohm coaxial
	AUI transceiver via 16-pin connector
Boot ROM	Available

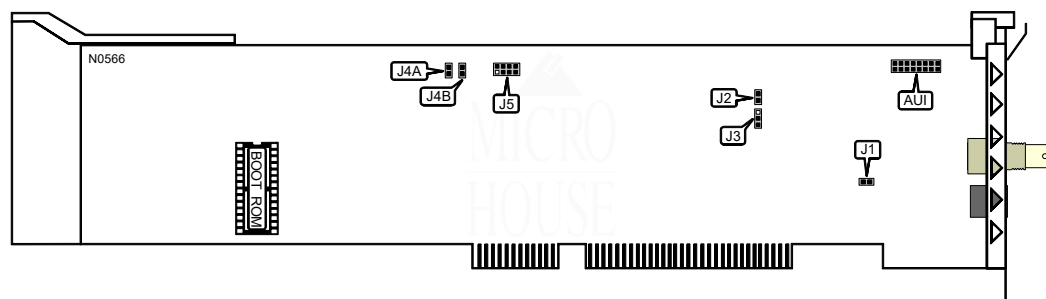

SEGMENT LENGTH	
Maximum Length	J1
185 meters	Closed
300 meters	Open
Note: Segment length is the total length of cable between the two farthest cards on the segment. Each card on the segment must have this option set the same.	

NETWORK VERSION	
Version	J2
iEthernet version 2	Open
Ethernet version 1	Closed

LINK INTEGRITY TEST	
Setting	J3
iEnabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

Continued on next page . . .

COMPEX, INC.
E N E T 1 6 - M C / P

... continued from previous page

SOFTWARE DRIVER		
Driver	J4A	j4B
iCOMPEX	Closed	Closed
SMC or WD	Closed	Open
Novell	Open	Closed
Software selectable	Open	Open

CONNECTIONS	
Connector	Purpose
J5	Factory diagnostic port
AUI	16-pin header to DB-15 connector