


# COMPEX, INC. TNET16-MC

|                      |                                                                                          |
|----------------------|------------------------------------------------------------------------------------------|
| <b>NIC Type</b>      | Token-Ring                                                                               |
| <b>Transfer Rate</b> | 4/16Mbps                                                                                 |
| <b>Data Bus</b>      | MCA                                                                                      |
| <b>Topology</b>      | Ring                                                                                     |
| <b>Wiring Type</b>   | Unshielded twisted pair (IBM Type 3)<br>Shielded twisted pair via DB-9 port (IBM Type 1) |
| <b>Boot ROM</b>      | Available                                                                                |

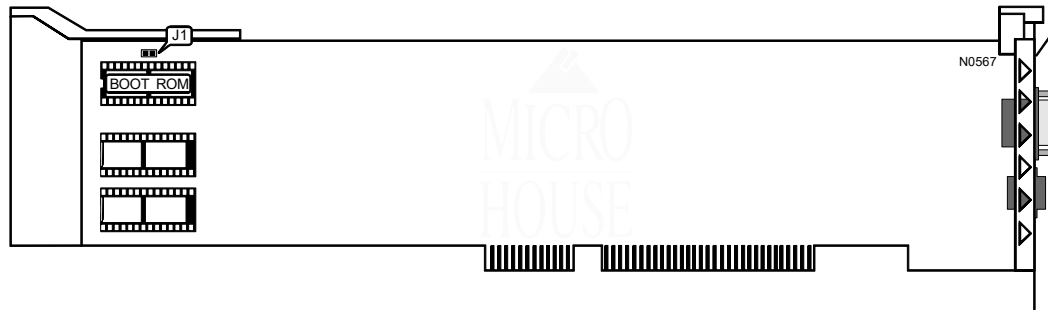

| BOOT ROM                                                     |        |
|--------------------------------------------------------------|--------|
| Setting                                                      | J1     |
| Built in Microcode RPL code enabled/Boot ROM socket disabled | Open   |
| Built in Microcode RPL code disabled/Boot ROM socket enabled | Closed |