


## Chapter 5: Jumper Settings

### MULTIWAVE INNOVATION

### AUDIOWAVE PLATINUM 16

|                           |  |
|---------------------------|--|
| <b>Card Type</b>          | Sound card/CD-ROM  |
| <b>Chipset Controller</b> | Unidentified   |
| <b>I/O Options</b>        | 3D space processor interface, CD audio, CD-ROM interfaces (4), midi/game port, microphone jack, line in, line out, speaker jack, wavetable interface |
| <b>Maximum DRAM</b>       | N/A  |

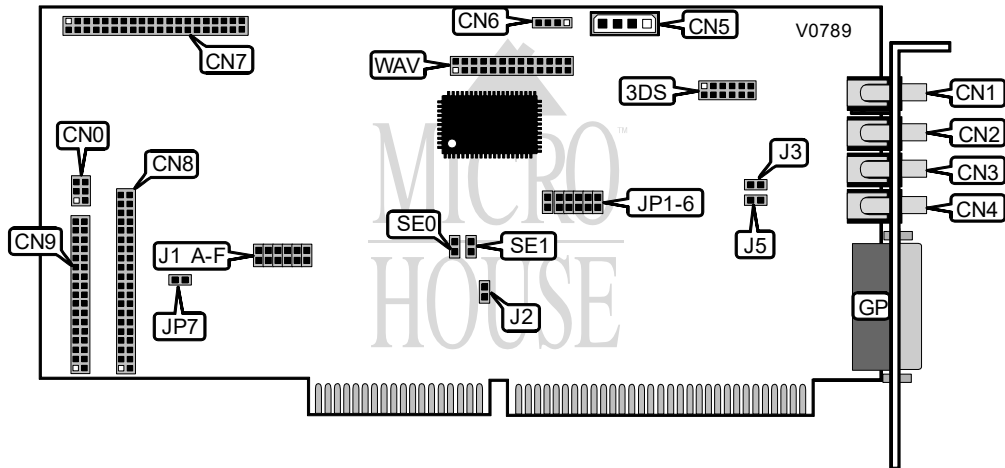

| CONNECTIONS           |          |                            |          |
|-----------------------|----------|----------------------------|----------|
| Purpose               | Location | Purpose                    | Location |
| 3D space processor    | 3DS      | Panasonic CD-ROM interface | CN7      |
| Speaker jack          | CN1      | Mitsumi CDROM interface    | CN8      |
| Line-out              | CN2      | Sony CDROM interface       | CN9      |
| Line-in               | CN3      | SCSI CDROM extension       | CN0      |
| Microphone jack       | CN4      | Midi/Game port             | GP       |
| Panasonic CDROM audio | CN5      | Wavetable interface        | WAV      |
| Sony CDROM audio      | CN6      |                            |          |

| GAME PORT CONFIGURATION |        |
|-------------------------|--------|
| Mode                    | J1 A   |
| if Enabled              | Open   |
| Disabled                | Closed |

| GAME PORT ADDRESS SELECTION |        |
|-----------------------------|--------|
| Address                     | J1 F   |
| if 201h                     | Open   |
| 200h                        | Closed |

Continued next page...

**THE NETWORK INTERFACE CARD TECHNICAL GUIDE**  
**MULTIWAVE INNOVATION**  
**AUDIOWAVE PLATINUM 16**

... continued from previous page.

| MIDI PORT CONFIGURATION |        |
|-------------------------|--------|
| Mode                    | J1 D   |
| í Enabled               | Open   |
| Disabled                | Closed |

| MIDI PORT ADDRESS SELECTION |        |
|-----------------------------|--------|
| Address                     | J1 E   |
| í 330h                      | Open   |
| 320h                        | Closed |

| WINDOWS SOUND MODE PORT ADDRESS SELECTION |        |        |
|---|--------|--------|
| Address                                   | SE0    | SE1    |
| í 530h                                    | Closed | Closed |
| 604h                                      | Open   | Closed |
| E80h                                      | Closed | Open   |
| F40h                                      | Open   | Open   |

| MIDI INTERRUPT SELECTION |        |        |        |
|--------------------------|--------|--------|--------|
| IRQ                      | JP1    | JP2    | JP3    |
| í 9                      | Closed | Open   | Open   |
| 5                        | Open   | Open   | Closed |
| 7                        | Open   | Closed | Open   |
| None                     | Open   | Open   | Open   |

| SOUND CARD ADDRESS SELECTION |        |        |
|------------------------------|--------|--------|
| Address                      | J1 B   | J1 C   |
| 220h                         | Open   | Closed |
| 240h                         | Closed | Open   |
| 260h                         | Open   | Open   |
| Disable                      | Closed | Closed |

| CD-ROM TYPE SELECTION |        |
|-----------------------|--------|
| Type                  | JP7    |
| í Panasonic           | Closed |
| Sony                  | Open   |
| Mitsumi               | Open   |
| SCSI                  | Open   |

Continued next page...

**Chapter 5: Jumper Settings**  
**MULTIWAVE INNOVATION**  
**AUDIOWAVE PLATINUM 16**

. . . continued from previous page.

| CD-ROM INTERFACE INTERRUPT SELECTION |        |        |        |
|--------------------------------------|--------|--------|--------|
| IRQ                                  | JP4    | JP5    | JP6    |
| í None                               | Open   | Open   | Open   |
| 5                                    | Open   | Open   | Closed |
| 12                                   | Open   | Closed | Open   |
| 15                                   | Closed | Open   | Open   |

| CD-ROM INTERFACE ADDRESS SELECTION |        |
|------------------------------------|--------|
| Address                            | J2     |
| í 340h                             | Open   |
| 320h                               | Closed |

| MICROPHONE SELECTION |        |        |
|----------------------|--------|--------|
| Setting              | J3     | J5     |
| í All Mic            | Closed | Closed |
| Dynamic Mic only     | Open   | Open   |