


QUICK TECHNOLOGY, INC.
SIDE-2605 (REV. 1.0)

Card Type	Multi I/O
Chipset Controller	Unidentified
I/O Options	Parallel port, Serial port (2)
Maximum Dram	N/A

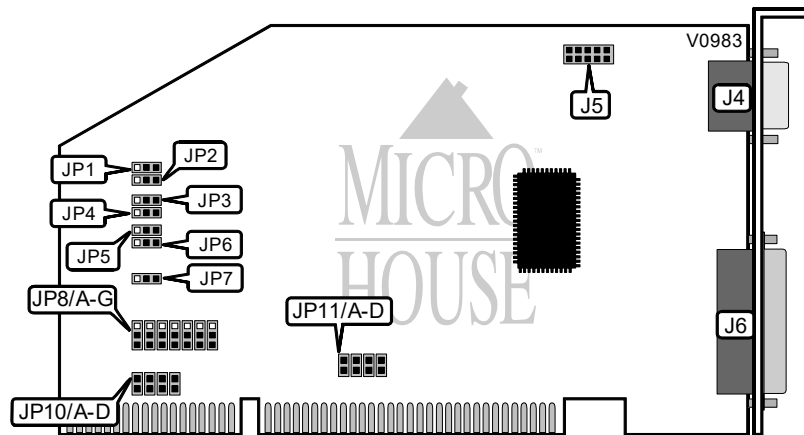

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	J4	Parallel port	J6
Serial port 2	J5		

SERIAL PORT 1 ADDRESS SELECTION		
Address	JP1	JP2
3F8h	Pins 1 & 2 closed	Pins 1 & 2 closed
2F8h	Pins 1 & 2 closed	Pins 2 & 3 closed
3E8h	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed

SERIAL PORT 2 ADDRESS SELECTION		
Address	JP3	JP4
3F8h	Pins 1 & 2 closed	Pins 1 & 2 closed
2F8h	Pins 1 & 2 closed	Pins 2 & 3 closed
3E8h	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed

Continued next page...

QUICK TECHNOLOGY, INC.
SIDE-2605 (REV. 1.0)

... continued from previous page.

PARALLEL PORT ADDRESS SELECTION		
Address	JP5	JP6
3F8h	Pins 1 & 2 closed	Pins 1 & 2 closed
2F8h	Pins 1 & 2 closed	Pins 2 & 3 closed
3E8h	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed

CARD NUMBER ADDRESS SELECTION		
Card	Address	JP7
1	3F0h	Pins 1 & 2 closed
2	370h	Pins 2 & 3 closed

SERIAL PORT 1 INTERRUPT SELECTION (PINS 2 & 3)							
IRQ	JP8/A	JP8/B	JP8/C	JP8/D	JP8/E	JP8/F	JP8/G
4	Open	Closed	Open	Open	Open	Open	Open
3	Closed	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open
9	Open	Open	Open	Closed	Open	Open	Open
10	Open	Open	Open	Open	Closed	Closed	Open
11	Open	Open	Open	Open	Open	Open	Closed

SERIAL PORT 2 INTERRUPT SELECTION (PINS 1 & 2)							
IRQ	JP8/A	JP8/B	JP8/C	JP8/D	JP8/E	JP8/F	JP8/G
3	Closed	Open	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open
9	Open	Open	Open	Closed	Open	Open	Open
10	Open	Open	Open	Open	Closed	Closed	Open
11	Open	Open	Open	Open	Open	Open	Closed

PARALLEL PORT INTERRUPT SELECTION				
IRQ	JP10/A	JP10/B	JP10/C	JP10/D
7	Open	Closed	Open	Open
5	Closed	Open	Open	Open
12	Open	Open	Closed	Open
15	Open	Open	Open	Closed

DMA CHANNEL SELECTION				
Channel	JP11/A	JP11/B	JP11/C	JP11/D
3	Open	Open	Closed	Closed
1	Closed	Closed	Open	Open