


SIIG, INC.  
TWINCOM PROFESSIONAL

**Card Type**  
**Chipset Controller**  
**I/O Options**  
**Maximum DRAM**

Serial card  
Unidentified  
Serial ports (2)  
N/A

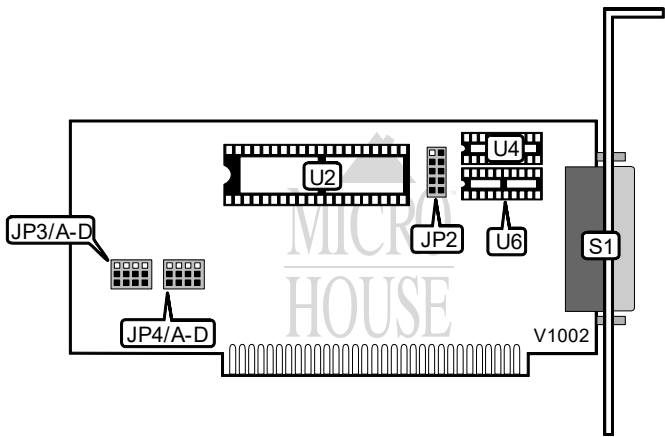

CONNECTIONS			
Purpose :	Location	Purpose :	Location
10-pin serial port interface	JP2	25-pin serial port connector	S1

SERIAL PORT 1 CONFIGURATION				
COM	JP3/A	JP3/B	JP3/C	JP3/D
COM1 (3F8h-3FFh)	Pins 1 & 2 closed	Open	Open	Open
COM2 (2F8h-2FFh)	Open	Pins 1 & 2 closed	Open	Open
COM3 (3E8h-3EFh)	Open	Open	Pins 1 & 2 closed	Open
COM4 (2E8h-2EFh)	Open	Open	Open	Pins 1 & 2 closed
Disabled	Open	Open	Open	Open

Continued next page...

SIIG, INC.  
TWINCOM PROFESSIONAL

... continued from previous page.

SERIAL PORT 1 INTERRUPT SELECTION				
IRQ	JP4/A	JP4/B	JP4/C	JP4/D
í 4	Pins 1 & 2 closed	Open	Open	Open
2/9	Pins 2 & 3 closed	Open	Open	Open
3	Open	Pins 2 & 3 closed	Open	Open
5	Open	Pins 1 & 2 closed	Open	Open
Disabled	Open	Open	Open	Open

SERIAL PORT 2 CONFIGURATION				
COM	JP3/A	JP3/B	JP3/C	JP3/D
í Disabled	Open	Open	Open	Open
COM1 (3F8h-3FFh)	Pins 2 & 3 closed	Open	Open	Open
COM2 (2F8h-2FFh)	Open	Pins 2 & 3 closed	Open	Open
COM3 (3E8h-3EFh)	Open	Open	Pins 2 & 3 closed	Open
COM4 (2E8h-2EFh)	Open	Open	Open	Pins 2 & 3 closed

SERIAL PORT 2 INTERRUPT SELECTION				
IRQ	JP4/A	JP4/B	JP4/C	JP4/D
í Disabled	Open	Open	Open	Open
2/9	Open	Open	Pins 2 & 3 closed	Open
3	Open	Open	Open	Pins 2 & 3 closed
4	Open	Open	Pins 1 & 2 closed	Open
5	Open	Open	Open	Pins 1 & 2 closed

SERIAL PORT 2 ACTIVATION	
Chip	Socket
16550	U2
1488	U4
1489	U6
Note: To activate serial port 2 upgrade chips must be installed.	