


U.S. ROBOTICS, INC.
HIGH SPEED DUAL ASYNCHRONOUS SERIAL
BOARD

Card Type	Serial card
Chipset Controller	165550AN UART
I/O Options	Serial port (2)
Maximum DRAM	N/A

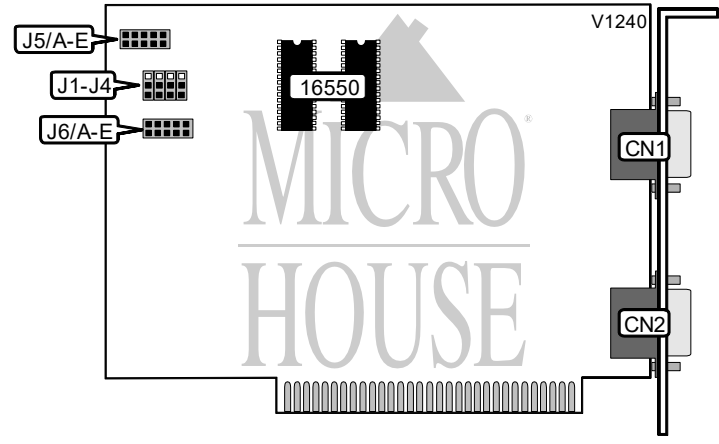

CONNECTIONS			
Purpose :	Location	Purpose :	Location
9-pin serial port	CN1	9-pin serial port	CN2

SERIAL PORT CHANNEL A CONFIGURATION				
Setting	J1	J2	J3	J4
COM1: (3F8h)	Pins 1 & 2 closed	Open	Open	Open
COM2: (3E8h)	Open	Pins 1 & 2 closed	Open	Open
COM3: (2F8h)	Open	Open	Pins 1 & 2 closed	Open
COM4: (2E8h)	Open	Open	Open	Pins 1 & 2 closed

SERIAL PORT CHANNEL B CONFIGURATION				
Setting	J1	J2	J3	J4
COM2: (3E8h)	Open	Pins 2 & 3 closed	Open	Open
COM1: (3F8h)	Pins 2 & 3 closed	Open	Open	Open
COM3: (2F8h)	Open	Open	Pins 2 & 3 closed	Open
COM4: (2E8h)	Open	Open	Open	Pins 2 & 3 closed

Continued next page...

U.S. ROBOTICS, INC.
HIGH SPEED DUAL ASYNCHRONOUS SERIAL
BOARD

... continued from previous page.

CHANNEL A INTERRUPT SELECTION					
IRQ	J5/A	J5/B	J5/C	J5/D	J5/E
4	Open	Open	Closed	Open	Open
2	Closed	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open
5	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Closed

CHANNEL B INTERRUPT SELECTION					
IRQ	J6/A	J6/B	J6/C	J6/D	J6/E
3	Open	Closed	Open	Open	Open
2	Closed	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open
5	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Closed