


COMPEX, INC. ENET16-TP/P

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Shielded/Unshielded Twisted Pair
	AUI transceiver via DB-15 port
Boot ROM	Available

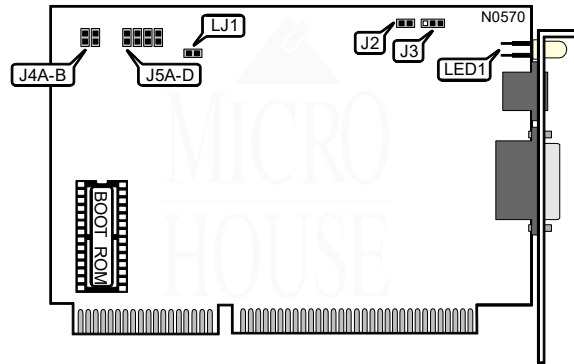

NETWORK VERSION	
Version	J2
iEthernet version 2	Open
Ethernet version 1	Closed

LINK INTEGRITY TEST	
Setting	J3
iEnabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

I/O BASE ADDRESS				
Address	J5A	J5B	J5C	J5D
200h	Closed	Closed	Closed	Closed
240h	Closed	Closed	Open	Closed
280h	Closed	Open	Closed	Closed
2C0h	Closed	Open	Open	Closed
300h	Open	Closed	Closed	Closed
340h	Open	Closed	Open	Closed
380h	Open	Open	Closed	Closed
3C0h	Open	Open	Open	Closed

Continued on next page . . .

COMPEX, INC.
ENET16-TP/P

... continued from previous page

INTERRUPT REQUEST		
IRQ	J4A	J4B
4	Closed	Open
5	Closed	Closed
7	Open	Closed

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Twisted Pair link is correctly configured
LED1	Off	Twisted Pair link is incorrectly configured
LJ1	On	Data is being transmitted or received
LJ1	Off	Data is not being transmitted or received