


# U.S. ROBOTICS, INC. SPORTSTER 28,800 INTERNAL

<b>Modem Type</b>	Data (synchronous/asynchronous)/Fax
<b>Maximum Data Rate</b>	28.8Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Bus</b>	8-bit ISA
<b>Fax Class</b>	Class I & II.0
<b>Data Modulation Protocol</b>	Bell 103A/212A ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34 Rockwell V.FC
<b>Fax Modulation Protocol</b>	ITU-T V.17, V.21CH2, V.27ter, V.29
<b>Error Correction/Compression</b>	MNP5, V.42, V.42bis

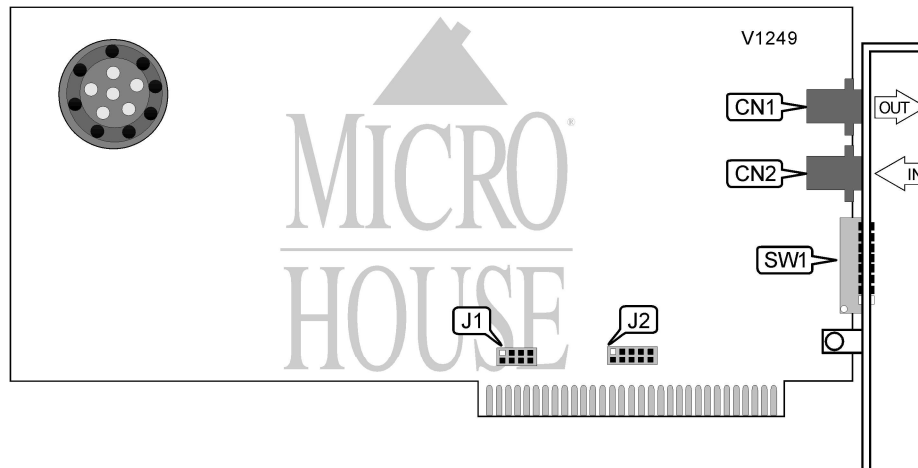

CONNECTIONS			
Purpos	Location	Purpos	Location
Line out	CN1	Line in	CN2

COM PORT SETTINGS				
COM	J1/1	J1/2	J1/3	J1/4
COM1	Closed	Open	Open	Open
COM2	Open	Closed	Open	Open
COM3	Open	Open	Closed	Open
COM4	Open	Open	Open	Closed

INTERRUPT SELECT					
Interrupt	J2/1	J2/2	J2/3	J2/4	J2/5
IRQ2	Closed	Open	Open	Open	Open
IRQ3	Open	Closed	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open
IRQ5	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Closed

Continued on next page . . .

U.S. ROBOTICS, INC.  
SPORTSTER 28,800 INTERNAL

...continued from previous page

DTR SIGNAL	
Setting	SW1/1
í DTR normal	Off
DTR forced high	On

RESULT CODES	
Setting	SW1/2
í Verbal result codes enabled	Off
Numeric result codes enabled	On

RESULT CODES DISPLAY	
Setting	SW1/3
í Enabled	On
Disabled	Off

ECHO DISPLAY	
Setting	SW1/4
í Enabled	Off
Disabled	On

AUTO ANSWER	
Setting	SW1/5
í Disabled	On
Enabled	Off

CARRIER DETECT	
Setting	SW1/6
í CD normal	Off
CD forced high	On

SOFTWARE RESET	
Setting	SW1/7
í CD normal	Off
CD forced high	On

AT COMMAND SET	
Setting	SW1/8
Enabled	On
Disabled	Off

## Proprietary AT Command Set

See document V1248 for a full command summary.