


# INTEL CORPORATION

## TOKENEXPRESS ISA/8

<b>NIC Type</b>	Token Ring
<b>Transfer Rate</b>	4/16Mbps
<b>Data Bus</b>	8-bit ISA
<b>Topology</b>	Ring
<b>Wiring Type</b>	Shielded/Unshielded Twisted Pair
<b>Boot ROM</b>	Available

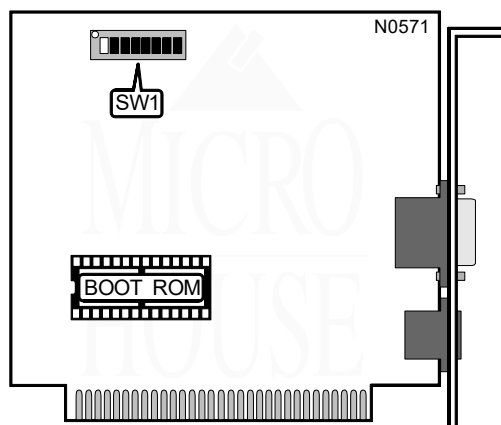

NETWORK SEGMENT SPEED		
Speed	SW1/1	
16Mbps		On
4Mbps		Off
Note: All cards on the network segment must have this option set the same.		

I/O BASE ADDRESS		
Address	SW1/2	SW1/3
220 - 23Fh	Off	Off
224 - 24Fh	Off	On
250 - 26Fh	On	Off
254 - 27Fh	On	On

INTERRUPT REQUEST		
IRQ	SW1/4	SW1/5
2	Off	Off
3	On	Off
5	Off	On
7	On	On

Continued on next page . . .

## INTEL CORPORATION

## TokenExpress ISA/8

... continued from previous page

BOOT ROM ADDRESS			
Address	SW1/6	SW1/7	SW1/8
Disabled	Off	Off	Off
C6000 - C7FFFh	On	Off	Off
CA000 - CBFFFh	Off	On	Off
CE000 - CFFFFh	On	On	Off
D2000 - D3FFFh	Off	Off	On
D6000 - D7FFFh	On	Off	On
DA000 - DBFFFh	Off	On	On
DE000 - DFFFFh	On	On	On