


U.S. ROBOTICS, INC.  
MICROLINK 2400

Modem Type	Data (synchronous/asynchronous)
Maximum Data Rate	2400bps
Data Bus	8-bit ISA
Data Modulation Protocol	Bell 103A/212A ITU-T V.22

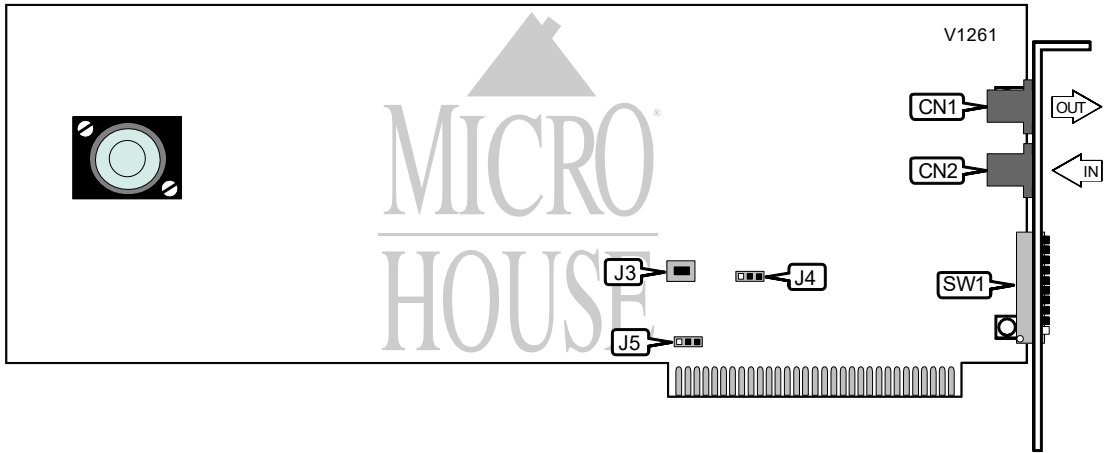

CONNECTIONS			
Purpos	Location	Purpos	Location
Line out	CN1	Line in	CN2

DTR SIGNAL	
Setting	SW1/1
! DTR forced high	On
DTR normal	Off

RESULT CODES	
Setting	SW1/2
! Verbose codes enabled	Off
Numeric result codes enabled	On

RESULT CODES DISPLAY	
Setting	SW1/3
Display disabled	Off
! Display enabled	On

Continued on next page . . .

U.S. ROBOTICS, INC.  
MICROLINK 2400

...continued from previous page

ECHO COMMANDS DISPLAY	
Setting	SW1/4
í Local echo enabled	Off
Local echo disabled	On

AUTO ANSWER	
Setting	SW1/5
í Modem doe not answer on first ring	On
Modem answers on first ring	Off

CARRIER DETECT	
Setting	SW1/6
í CD normal	Off
CD forced high	On

MULTI-LINE INSTALLATION	
Setting	SW1/7
í Single phone connected	Off
Multiple phones connected	On

AT COMMAND SET	
Setting	SW1/8
í AT command set enabled	On
AT command set disabled	Off

ESCAPE CODE	
Setting	SW1/9
í Go to command mode and display OK result code when escape character is received	On
Disconnect, go to command mode and display NO CARRIER when escape character is received	Off

VOLUME	
Setting	SW1/10
í High	Off
Low	On

BASE I/O ADDRESS SELECTION		
Address	J3	J4
COM1: (3F8h)	Off	Pins 2 & 3 closed
COM2: (2F8h)	On	Pins 2 & 3 closed
COM3: (3E8h)	Off	Pins 1 & 2 closed
COM4: (2E8h)	On	Pins 1 & 2 closed

Continued on next page . . .

...continued from previous page

INTERRUPT	
IRQ	J5
4	Pins 2 & 3 closed
3	Pins 1 & 2 closed

**Proprietary AT Command Set**

See document V1260 for a full command summary.