


UNIDENTIFIED AT IO - V 8

Card Type
Chipset Controller
I/O Options
Maximum DRAM

Multi I/O card
N/A
Game/MIDI port, parallel port, serial port (2)
N/A

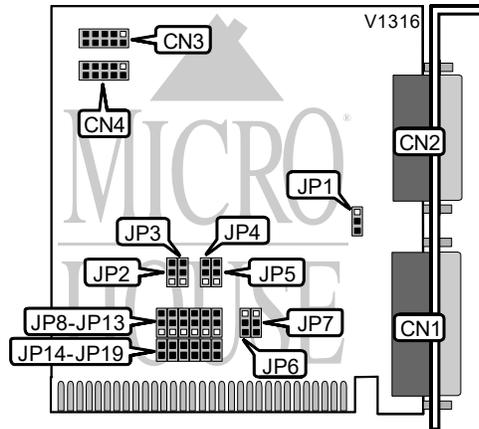

CONNECTIONS			
Purpose :	Location	Purpose :	Location
25-pin parallel port	CN1	10-pin serial port 1	CN3
15-pin game/MIDI port	CN2	10-pin serial port 2	CN4

GAME PORT CONFIGURATION	
Setting	JP1
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

SERIAL PORT 1 COM SELECTION	
COM	JP4
COM1	Pins 2 & 3 closed
COM3	Pins 1 & 2 closed

SERIAL PORT 1 CONFIGURATION	
Setting	JP5
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

Continued next page...

UNIDENTIFIED ATIO-V8

... continued from previous page.

SERIAL PORT 2 COM SELECTION	
COM	JP2
COM2	Pins 2 & 3 closed
COM4	Pins 1 & 2 closed

SERIAL PORT 2 CONFIGURATION	
Setting	JP3
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

PARALLEL PORT LPT SELECTION	
LPT	JP6
LPT1	Pins 2 & 3 closed
LPT2	Pins 1 & 2 closed

PARALLEL PORT CONFIGURATION	
Setting	JP7
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

SERIAL PORT 1 INTERRUPT SELECTION (PINS 1 & 2)						
IRQ	JP8	JP9	JP10	JP11	JP12	JP13
3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Closed	Open
9	Open	Open	Open	Open	Open	Closed

SERIAL PORT 2 INTERRUPT SELECTION (PINS 2 & 3)						
IRQ	JP8	JP9	JP10	JP11	JP12	JP13
3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Closed	Open
9	Open	Open	Open	Open	Open	Closed

Continued next page...

UNIDENTIFIED
ATIO - V 8

... continued from previous page.

PARALLEL PORT INTERRUPT SELECTION						
IRQ	JP14	JP15	JP16	JP17	JP18	JP19
3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Closed	Open
9	Open	Open	Open	Open	Open	Closed