


THE NETWORK INTERFACE CARD TECHNICAL GUIDE

ANSEL COMMUNICATIONS, INC.
NS 2 1 0 0 - T A / NS 2 1 0 0 - 3 / NS 2 1 0 0 - B A

NIC Type	Ethernet	
Transfer Rate	10Mbps	
Data Bus	16-bit ISA	
Topology	Linear bus	
Wiring Type	Unshielded Twisted Pair	(NS2100-3, NS2100-TA)
	RG58A/U 50ohm coaxial	(NS2100-3, NS2100-BA)
	AUI transceiver via DB15	(NS2100-3, NS2100-BA, NS2100-TA)
Boot ROM	Available	

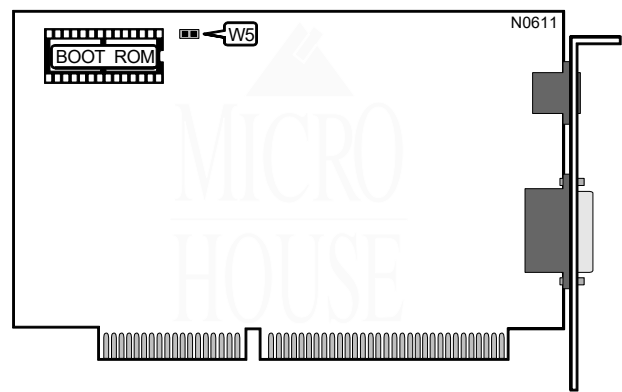

BOOT ROM CONFIGURATION			
Mode		W5	
Enabled		Closed	
Disabled		Open	

DIAGRAM NOTES	
Note:	Diagram depicts NS2100-TA. Models NS2100-3 and NS2100-BA are identical, except for connection options.