
THE NETWORK INTERFACE CARD TECHNICAL GUIDE

KINGSTON TECHNOLOGY CORPORATION ETHERX KNE2102

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear bus

Wiring Type RG58A/U 50ohm coaxial

Boot ROM Available

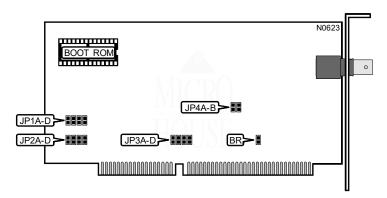

BOOT ROM		
Mode	BR	
Disabled	Open	
Enabled	Closed	

DMA CHANNEL								
Channel	JP1A	JP1B	JP1C	JP1D	JP2A	JP2B	JP2C	JP2D
DMA3	Open	Open	Open	Closed	Open	Open	Open	Closed
DMA5	Open	Open	Closed	Open	Open	Open	Closed	Open
DMA6	Open	Closed	Open	Open	Open	Closed	Open	Open
DMA7	Closed	Open	Open	Open	Closed	Open	Open	Open

		INTERRUPT SETTINGS	3	
IRQ	JP3A	JP3B	JP3C	JP3D
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open
9	Open	Open	Open	Closed

Continued on next page . . .

KINGSTON TECHNOLOGY CORPORATION ETHERX KNE2102

. . . continued from previous page

BASE I/O ADDRESS				
Address	JP4A	JP4B		
í 300h	Closed	Closed		
320h	Open	Closed		
340h	Closed	Open		
360h	Open	Open		