


PACKARD BELL SOUND 144AM/AMSP

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	CD-ROM interface, Game/MIDI port, CD audio connectors (2), line in, line out, microphone jack, telephone jack
Data Bus	16-bit ISA

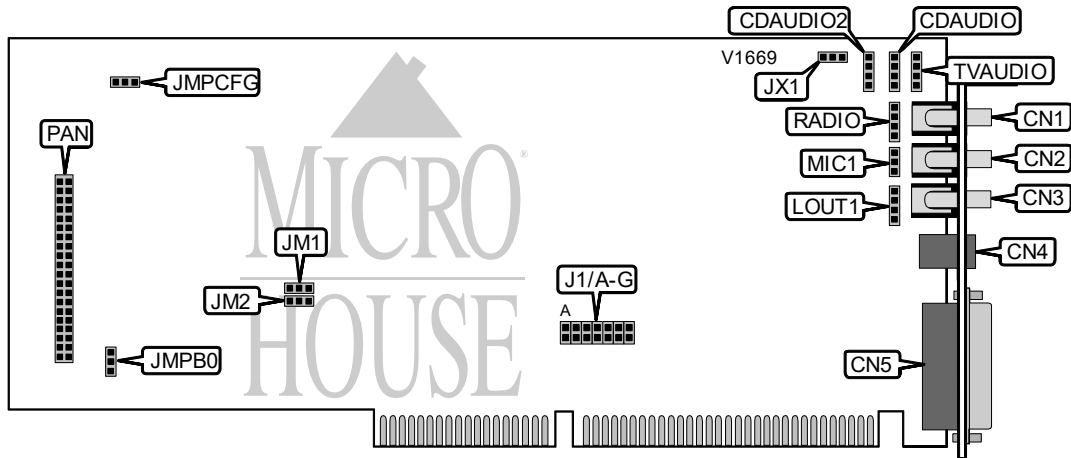

CONNECTIONS			
Function	Label	Function	Label
CD audio connector	CDAUDIO	Game/MIDI port	CN5
CD audio connector 2	CDAUDIO2	Microphone connector	MIC1
Line in	CN1	Panasonic CD-ROM interface	PAN
Microphone port	CN2	Radio audio in connector	RADIO
Line out	CN3	TV audio in connector	TVAUDIO
Telephone jack	CN4		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JMPCF G	N/A
í Factory configured - do not alter	JMPBO	N/A
í Condenser microphone is connected	JX1	Pins 1 & 2 closed
Carbon microphone is connected	JX1	Pins 2 & 3 closed
Note: The location of pin 1 is unidentified.		

Continued on next page. . .

PACKARD BELL SOUND 144AM/AMSP

. . . continued from previous page

MODEM INTERRUPT JUMPER							
IRQ	J1/A	J1/B	J1/C	J1/D	J1/E	J1/F	J1/G
2/9	Closed	Open	Open	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Closed

COM PORT ADDRESS SELECTION		
Setting	JM1	JM2
COM1	Pins 1 & 2 closed	pins 1 & 2 closed
COM2	Pins 1 & 2 closed	Pins 2 & 3 closed
COM3	Pins 2 & 3 closed	Pins 1 & 2 closed
COM4	Pins 2 & 3 closed	Pins 2 & 3 closed