
CABLETRON SYSTEMS, INC.

T8025

NIC Type Transfer Rate Token Ring 4/16Mbps **Data Bus** 16-bit ISA Topology

Ring
AUI transceiver via DB-15 port
Shielded twisted pair
Unshielded twisted pair Wiring Type

Boot ROM Available

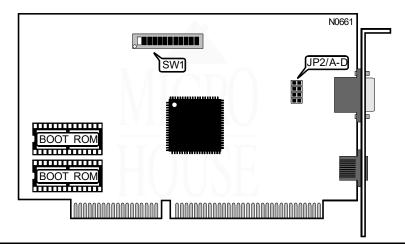

BASE MEMORY ADDRESS SELECT						
Adc ess	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
C0000h - C1FFFh	On	Off	Off	Off	Off	Off
C2000h - C3FFFh	On	Off	Off	Off	Off	On
C4000h - C5FFFh	On	Off	Off	Off	On	Off
C6000h - C7FFFh	On	Off	Off	Off	On	On
C8000h - C9FFFh	On	Off	Off	On	Off	Off
CA000h - CBFFFh	On	Off	Off	On	Off	On
CC000h - CDFFFh	On	Off	Off	On	On	Off
CE000h - CFFFFh	On	Off	Off	On	On	On
D0000h - CDFFFh	On	Off	On	Off	Off	Off
D2000h - D3FFFh	On	Off	On	Off	Off	On
D4000h - D5FFFh	On	Off	On	Off	On	Off
D6000h - D7FFFh	On	Off	On	Off	On	On
D8000h - D9FFFh	On	Off	On	On	Off	Off
DA000h - DBFFFh	On	Off	On	On	Off	On
DC000h - DDFFFh	On	Off	On	On	On	Off
DE000h - DFFFFh	On	Off	On	On	On	On

Continued on next page . . .

CABLETRON SYSTEMS, INC. T8025

. . . continued from previous page

DATA TRANSFER RATE		
Rate SW1/11		
4Mbps	Off	
16Mbps	On	

	INTERRUPT SELECT	
IRQ	SW1/7	SW1/{
IRQ2	Off	Off
IRQ3	Off	On
IRQ5	On	Off
IRQ7	On	On

PRIMARY/ALTERNATE ADAPTER		
Setting SW1/12		
Primary	Off	
Alternate	On	

RAM PAGE SIZE				
Size	SW1/9	SW1/1		
8KB	Off	Off		
16KB	Off	On		
32KB	On	Off		
64KB	On	On		

CABLE TYPE		
Туре	JP2/A - D	
Shielded twisted pair	Closed	
Unshielded twisted pair	Open	