


IBM CORPORATION

EASY OPTIONS POWERWAVE 16 MODEL CD658, EASY OPTIONS POWERWAVE 16 PLUS MODEL CD659, EASY OPTIONS POWERWAVE 16 PRO MODEL CD660

Card Type	CD-ROM card
Chip Set	N/A
Maximum Onboard Memory	N/A
I/O Options	Audio out, CD-ROM audio (2), CD-ROM interface (3)
Data Bus	16-bit ISA
Floppy drives supported	N/A

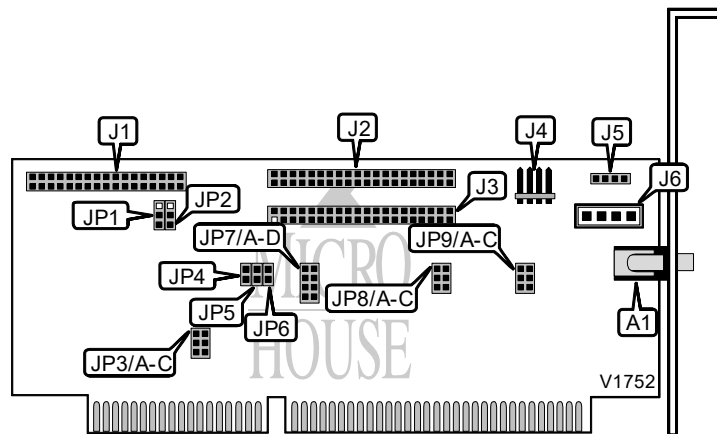

CONNECTIONS			
Function	Label	Function	Label
Audio out	A1	4-pin connector	J4
Sony CD-ROM interface	J1	CD - audio in	J5
Mitsumi CD-ROM interface	J2	CD - audio in	J6
Panasonic CD-ROM interface	J3		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP4	Closed
í Factory configured - do not alter	JP5	Open
í Factory configured - do not alter	JP6	Open

BASE I/O ADDRESS SELECTION			
Address	JP1		JP2
í 300h	Pins 1 & 2 closed		Pins 1 & 2 closed
310h	Pins 2 & 3 closed		Pins 1 & 2 closed
320h	Pins 1 & 2 closed		Pins 2 & 3 closed
330h	Pins 2 & 3 closed		Pins 2 & 3 closed

Continued on next page. . .

IBM CORPORATION
EASY OPTIONS POWERWAVE 16 MODEL CD658,
EASY OPTIONS POWERWAVE 16 PLUS MODEL
CD659, EASY OPTIONS POWERWAVE 16 PRO
MODEL CD660

. . . continued from previous page

INTERRUPT SELECTION							
IRQ	JP3/A	JP3/B	JP3/C	JP7/A	JP7/B	JP7/C	JP7/D
2/9	Closed	Open	Open	Open	Open	Open	Open
3	Open	Open	Open	Closed	Open	Open	Open
4	Open	Open	Open	Open	Closed	Open	Open
5	Open	Open	Open	Open	Open	Closed	Open
6	Open	Open	Open	Open	Open	Open	Closed
10	Open	Closed	Open	Open	Open	Open	Open
11	Open	Open	Closed	Open	Open	Open	Open

DMA CHANNEL SELECTION						
Channel	JP8/A	JP8/B	JP8/C	JP9/A	JP9/B	JP9/C
1	Closed	Open	Open	Closed	Open	Open
2	Open	Closed	Open	Open	Closed	Open
3	Open	Open	Closed	Open	Open	Closed