


# CREATIX POLYMEDIA

## CIRRUS LOGIC 14.4/VOICE (REV.2)

|                                     |  |
|-------------------------------------|--|
| <b>Card Type</b>                    | Modem (asynchronous)                     |
| <b>Chip Set</b>                     | Cirrus Logic                             |
| <b>I/O Options</b>                  | Voice                                    |
| <b>Maximum Data Rate</b>            | 14.4Kbps                                 |
| <b>Maximum Fax Rate</b>             | 14.4Kbps                                 |
| <b>Data Bus</b>                     | 8-bit ISA                                |
| <b>Fax Class</b>                    | Class I                                  |
| <b>Data Modulation Protocol</b>     | Bell 103A/212A                           |
| <b>Fax Modulation Protocol</b>      | ITU-T V.21, V.22, V.22bis, V.32, V.32bis |
| <b>Error Correction/Compression</b> | ITU-T V.17, V.21CH2, V.27ter, V.29       |
|                                     | MNP5, V.42, V.42bis                      |

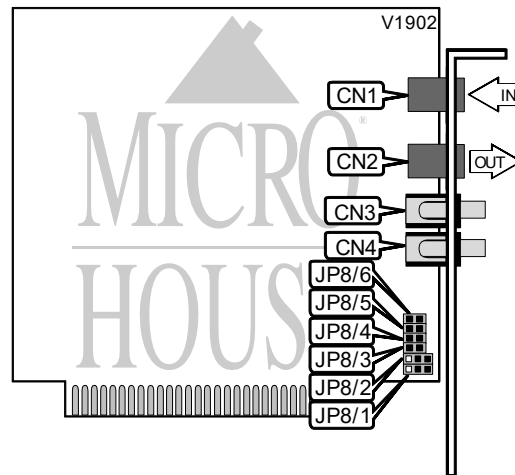

| CONNECTIONS |       |            |       |
|-------------|-------|------------|-------|
| Function    | Label | Function   | Label |
| Line in     | CN1   | Speaker    | CN3   |
| Line out    | CN2   | Microphone | CN4   |

| SERIAL PORT ADDRESS |                   |                   |  |
|---------------------|-------------------|-------------------|--|
| Setting             | JP8/1             | JP8/2             |  |
| COM1 (3F8h)         | Pins 1 & 2 closed | Pins 1 & 2 closed |  |
| COM2 (2F8h)         | Pins 2 & 3 closed | Pins 1 & 2 closed |  |
| COM3 (3E8h)         | Pins 1 & 2 closed | Pins 2 & 3 closed |  |
| i COM4 (2E8h)       | Pins 2 & 3 closed | Pins 2 & 3 closed |  |

| INTERRUPT |        |        |        |        |
|-----------|--------|--------|--------|--------|
| Setting   | JP8/3  | JP8/4  | JP8/5  | JP8/6  |
| 2         | Closed | Open   | Open   | Open   |
| i 3       | Open   | Closed | Open   | Open   |
| 4         | Open   | Open   | Closed | Open   |
| 5         | Open   | Open   | Open   | Closed |

## Proprietary AT Command Set

See document V1893 for a full command summary.