


THE NETWORK INTERFACE CARD TECHNICAL GUIDE

ALLIED TELESYN, INC.
AT - 1500 FT

| | |
|---------------|--|
| NIC Type | Ethernet |
| Transfer Rate | 10Mbps |
| Data Bus | 16-bit ISA |
| Topology | Star |
| Wiring Type | Fiber optic cable Unshielded twisted pair |
| Boot ROM | In firmware |

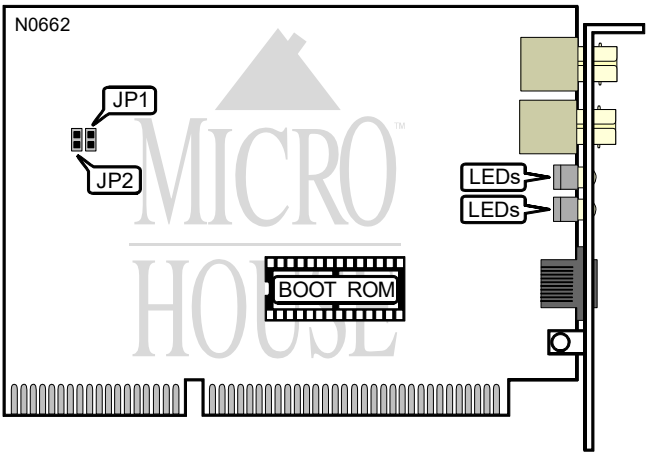


| BASE I/O ADDRESS | | |
|------------------|--------|--------|
| Address | JP1 | JP2 |
| 300h | Closed | Closed |
| 320h | Closed | Closed |
| 340h | Open | Open |
| 360h | Open | Open |

Continued on next page . . .

ALLIED TELESYN, INC.
AT-1500-FT

... continued from previous page



| DIAGNOSTIC LED(S) | | | |
|-------------------|--------|--------|-----------------------------------|
| LED | Color | Status | Condition |
| LED1 | Green | Off | Data is not being transmitted |
| LED1 | Green | On | Data is being transmitted |
| LED2 | Yellow | Off | Data is not being received |
| LED2 | Yellow | On | Data is being received |
| LED3 | Green | On | 10BaseT link integrity exists |
| LED3 | Green | Off | 10BaseT link integrity broken |
| LED4 | Yellow | On | Collisions detected on network |
| LED4 | Yellow | Off | No collisions detected on network |