


THE NETWORK INTERFACE CARD TECHNICAL GUIDE

ALLIED TELESYN, INC.
AT - 1500BT

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	RG58A/U 50ohm Unshielded twisted pair
Boot ROM	In firmware

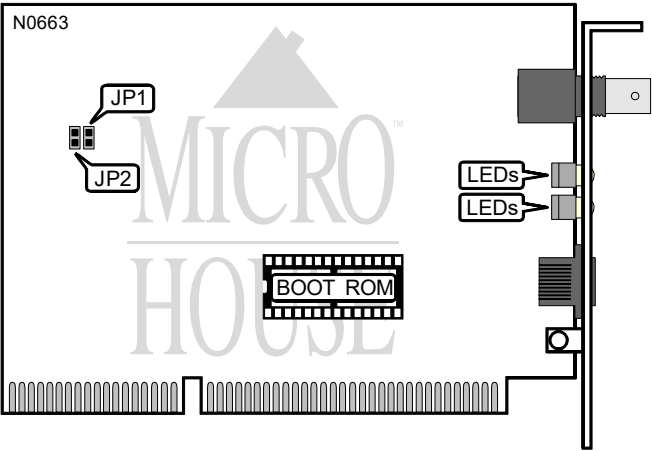


BASE I/O ADDRESS		
Address	JP1	JP2
300h	Closed	Closed
320h	Closed	Closed
340h	Open	Open
360h	Open	Open

Continued on next page . . .

ALLIED TELESYN, INC.
AT - 1500 - BT

... continued from previous page



DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	Off	Data is not being transmitted
LED1	Green	On	Data is being transmitted
LED2	Yellow	Off	Data is not being received
LED2	Yellow	On	Data is being received
LED3	Green	On	10BaseT link integrity exists
LED3	Green	Off	10BaseT link integrity broken
LED4	Yellow	On	Collisions detected on network
LED4	Yellow	Off	No collisions detected on network