


# WISECOM, INC.

## DATA/FAX/VOICE MODEM 14.4 (REV.2)

<b>Card Type</b>	Fax, Modem (asynchronous), Voice
<b>Chip Set</b>	Cirrus Logic
<b>I/O Options</b>	Voice
<b>Maximum Data Rate</b>	14.4Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Bus</b>	8-bit ISA
<b>Fax Class</b>	Class I
<b>Data Modulation Protocol</b>	Bell 103A/212A
<b>Fax Modulation Protocol</b>	ITU-T V.21, V.22, V.22bis, V.32, V.32bis
<b>Error Correction/Compression</b>	ITU-T V.17, V.21CH2, V.27ter, V.29 MNP5, V.42, V.42bis

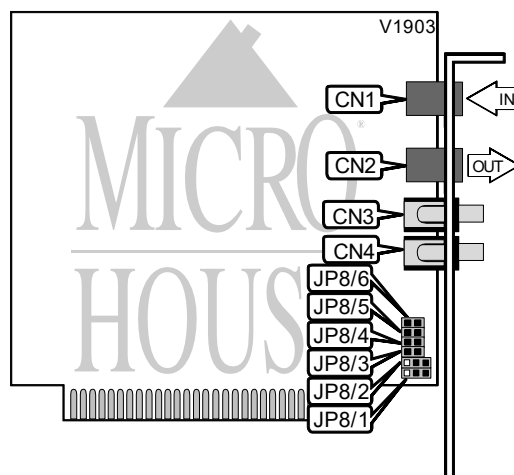

CONNECTIONS			
Function	Label	Function	Label
Line out	CN1	Speaker out	CN3
Line in	CN2	Microphone in	CN4

SERIAL PORT ADDRESS			
Setting	JP8/1	JP8/2	
COM1 (3F8h)	Pins 1 & 2 closed	Pins 1 & 2 closed	
COM2 (2F8h)	Pins 2 & 3 closed	Pins 1 & 2 closed	
COM3 (3E8h)	Pins 1 & 2 closed	Pins 2 & 3 closed	
COM4 (2E8h)	Pins 2 & 3 closed	Pins 2 & 3 closed	

INTERRUPT				
Setting	JP8/3	JP8/4	JP8/5	JP8/6
2	Closed	Open	Open	Open
3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

## Proprietary AT Command Set

See document V1871 for a full command summary.